
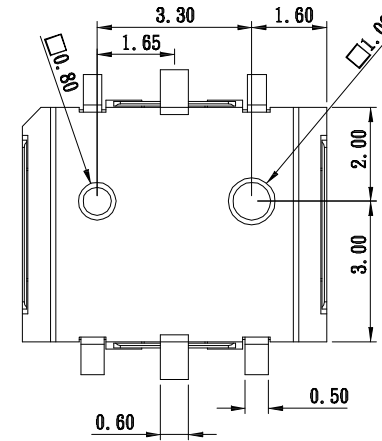

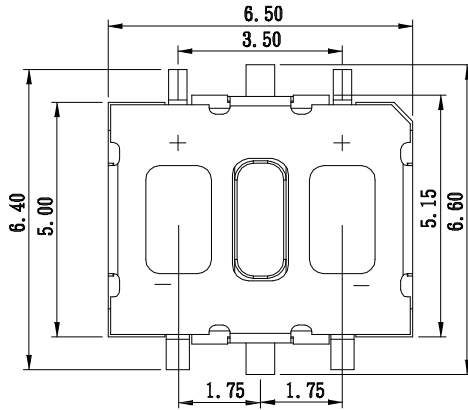
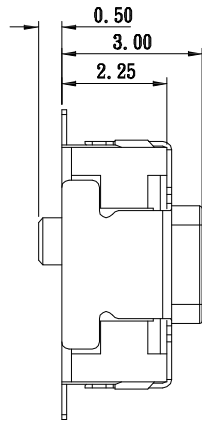
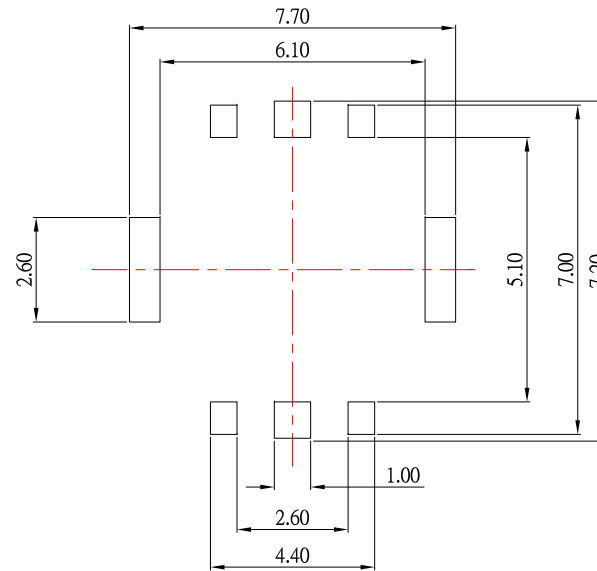


CIRCUIT DIAGRAM



P.C.B LAYOUT

COLOR OF LED

0	Without	1	Red
2	Green	4	Yellow
7	Blue	8	White

SPECIFICATIONS

Rating	20mA / 12V DC
Contact Resistance	100mΩ Max.
Insulation Resistance	250 V DC , 100mΩ Min.
Travel	0.23± 0.1mm
Operating Force	180 ± 50gf
Operating Life (cycles)	50,000
Operating Temperature Range	-20°C ~ +80°C



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
11/05/14
DATE
11/05/14
DATE
11/05/14

MAT'L		TITLE	SWITCH
FINISH		MODLE	TACT SWITCH WITH LED
SCALE	1 : 1	DWG NO.	TS-D1-xx-S010
SHEET NO.	1 of 1	PART NO.	TS-D1-xx-S010

SIZE
A4
VER
R