
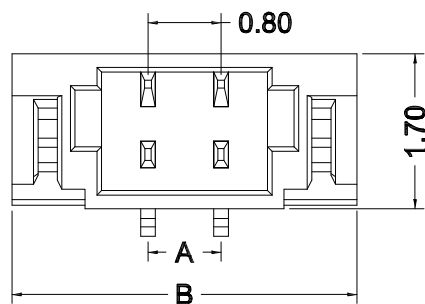



P.C.B LAYOUT MOUNTING PATTERN

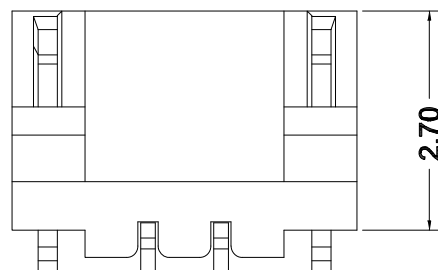

SPECIFICATIONS

Current rating : 0.5A AC , DC

Voltage rating : 30V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 100M Ω min.

Withstand voltage : 200V AC/minute

Contact resistance : 20m Ω /Max

Material:

Housing : Nylon 6T, UL94V0

Pin : Phosphor Bronze / Tin Plated

PART NO.	DIMENSION (mm)	
	A	B
WF-0800VS02	0.80	3.80
WF-0800VS03	1.60	4.60
WF-0800VS04	2.40	5.40
WF-0800VS05	3.20	6.20
WF-0800VS06	4.00	7.00
WF-0800VS08	5.60	8.60
WF-0800VS10	7.20	10.20
WF-0800VS12	8.80	11.80
WF-0800VS14	10.40	13.40
WF-0800VS15	11.20	14.20
WF-0800VS16	12.00	15.00
WF-0800VS17	12.80	15.80
WF-0800VS20	15.20	18.20
WF-0800VS22	16.80	19.80



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 11/12/12

CHECKED BY: Jacky Chen
DATE: 11/12/12

APPROVED BY: Tony Kao
DATE: 11/12/12

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

WAFER 0.8 刺破式 SMT 180度(JST)

WF-0800VSxx-S208

WF-0800VSxx-S208

SIZE
A4
VER
R