
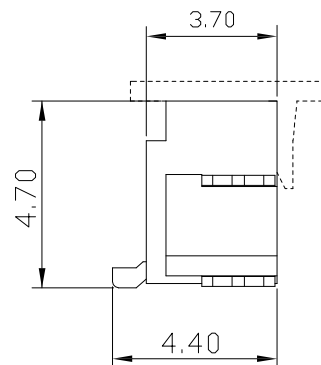
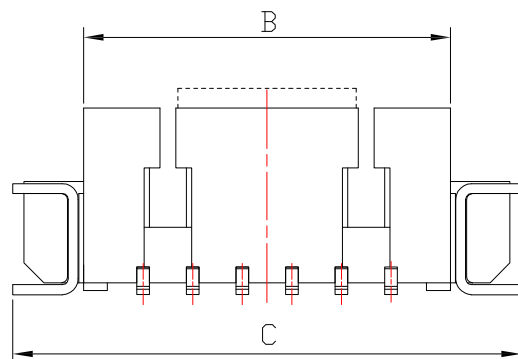
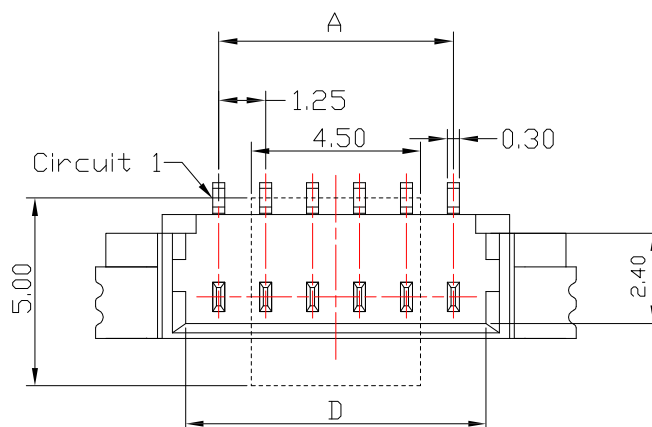


P.C.B LAYOUT MOUNTING PATTERN

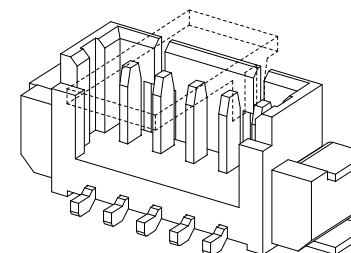

PORT NO	A	B	C	D
02P	1.25	4.25	7.35	3.05
03P	2.50	5.50	8.60	4.30
04P	3.75	7.75	9.85	5.55
05P	5.00	8.00	11.10	6.80
06P	6.25	9.25	12.35	8.05
07P	7.50	10.50	13.60	9.30
08P	8.75	11.75	14.85	10.55
09P	10.00	13.00	16.10	11.80
10P	11.25	14.25	17.35	13.05
11P	12.50	15.50	18.60	14.30
12P	13.75	16.75	19.85	15.55
13P	15.00	18.00	21.10	16.80
14P	16.25	19.25	22.35	18.05
15P	17.50	20.50	23.60	19.30
16P	18.75	21.75	24.85	20.55

SPECIFICATIONS

Current rating : 1.0A AC , DC

Voltage rating : 250V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 1000M Ω min.

Withstand voltage : 500 AC / minute

Contact resistance : 20m Ω / Max

Material:

Housing : Nylon 46 or LCP, UL94V-0

Contact : Brass / Tin over Nickel



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 01/06/16
DATE: 01/06/16
DATE: 01/06/16

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	WAFER P : 1.25mm SMT 180度
SCALE	DWG NO.	WF-1250VSxx-S304
SHEET NO.	PART NO.	WF-1250VSxx-S304

SIZE
A4
VER
R1