
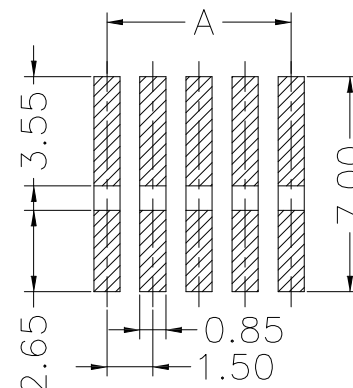




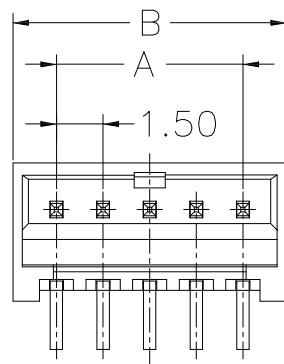


P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Current rating : 1.0A AC , DC
Voltage rating : 100V AC , DC
Temperature rating : -25°C ~ +85°C
Insulation resistance : 500M Ω min.
Withstand voltage : 500V AC/minute
Contact resistance : 20m Ω /Max
Material:
Housing : Nylon 6T, UL94V-0
Pin : Brass / Tin-plated
Contact : Phosphor Bronze

PART NO.	Dimensions	
	A	B
WF-1500VS02	1.50	4.30
WF-1500VS03	3.00	5.80
WF-1500VS04	4.50	7.30
WF-1500VS05	6.00	8.80
WF-1500VS06	7.50	10.30
WF-1500VS07	9.00	11.80
WF-1500VS08	10.50	13.30
WF-1500VS09	12.00	14.80

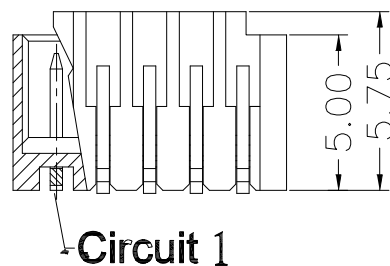

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	01/04/13				
CHECKED BY:	DATE	FINISH		MODLE	WAFER 1.5 SMT 180度
Jacky Chen	01/04/13				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	WF-1500VSxx-S208
Tony Kao	01/04/13	SHEET NO.	1 of 1	PART NO.	WF-1500VSxx-S208
					SIZE A4
					VER R1