

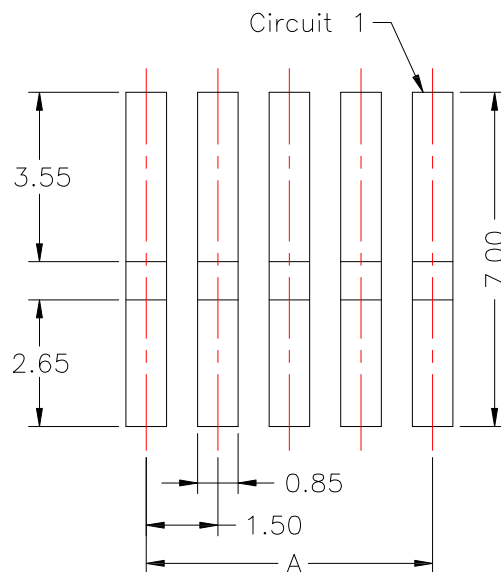
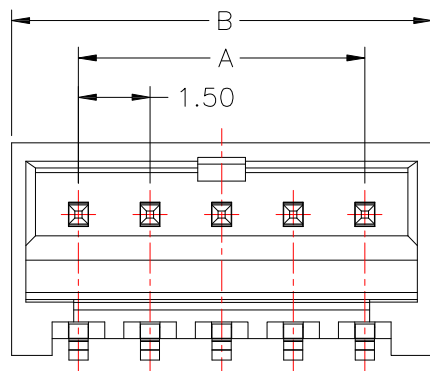



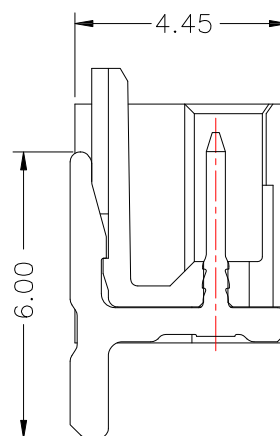

P.C.B LAYOUT MOUNTING PATTERN

PIN NO.	Dimensions	
	A	B
02	1.50	4.30
03	3.00	5.80
04	4.50	7.30
05	6.00	8.80
06	7.50	10.30
07	9.00	11.80
08	10.50	13.30
09	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

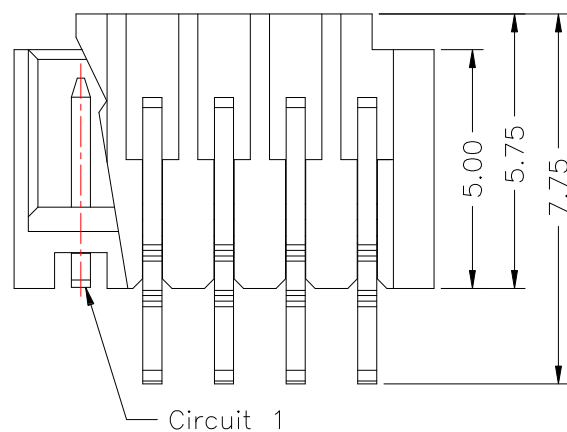

SPECIFICATIONS

- 1.Current rating : 3.0A , AC / DC
- 2.Voltage rating : 50V, AC / DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 100M Ω min.
- 5.Contact resistance : 20m Ω /Max
- 6.Withstand Voltage : 500V AC / minute

Material:

- 1.Housing : PA6T, UL94V-0
- 2.Contact : Brass,Tin over Nickel



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE 10/27/15
DATE 10/27/15
DATE 10/27/15

MAT'L
FINISH
SCALE 1 : 1
SHEET NO. 1 of 1

TITLE CONNECTOR
MODLE WAFER 1.5 SMT 90度
DWG NO. WF-1500RSxx-S304
PART NO. WF-1500RSxx-S304

SIZE A4
VER R

ITEM NO. DESCRIPTION DRAWN DATE