
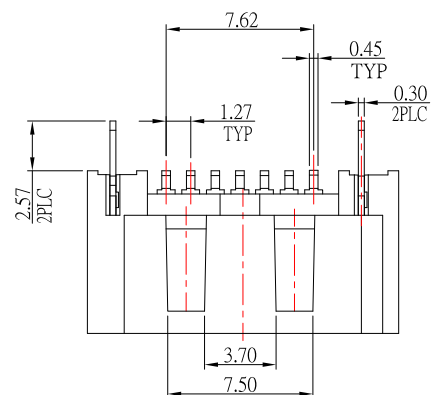


Increased CAP Drawing




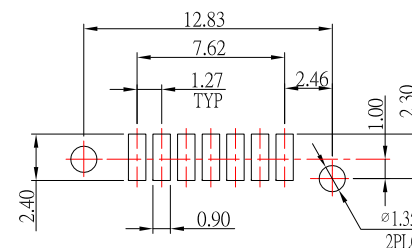


RECOMMENDED PCB LAYOUT

SATA-7B-84VS-x-S268

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

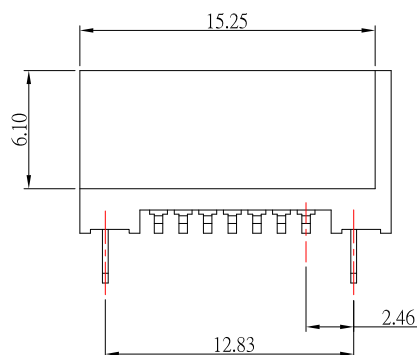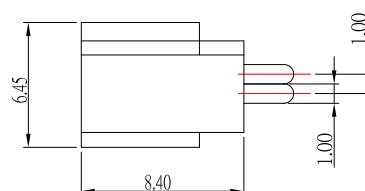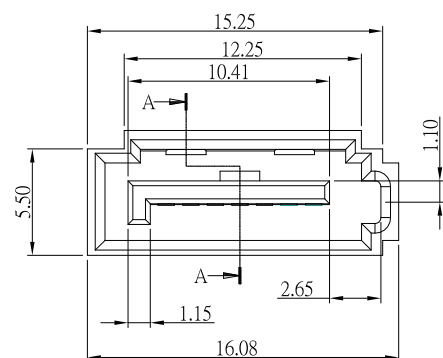

SECTION A-A

SPECIFICATION:

1.MATERIAL:

Housing: LCP , Black.

Contact: BRASS

Board Lock: BRASS

2.Finish:

Contact: Plated Gold in Mating Area ;

Tin Plated on Solder Balls ;

Nickel under plated overall

Board Lock: Tin Plated on Solder Balls ;

Nickel under plated overall



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
04/02/18
DATE
04/02/18
DATE
04/02/18

MAT'L
FINISH
SCALE

1 : 1

TITLE
MODLE
DWG NO.

CONNECTOR
SATA 7P B 型開槽全包接地片SMT
SATA-7B-84VS-x-S268

SIZE
A4
VER
A0

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新為A0版	Jack	040218