

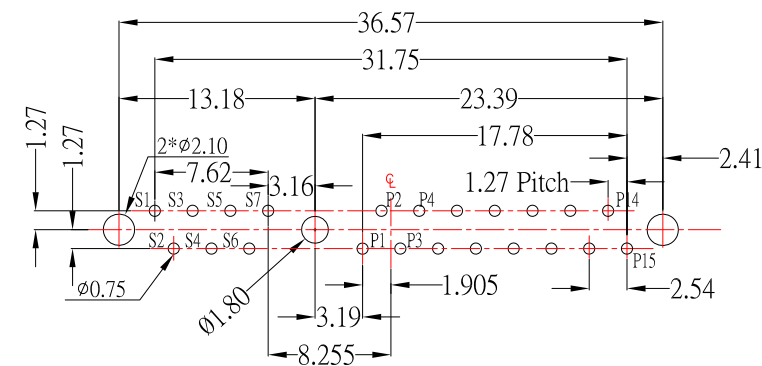
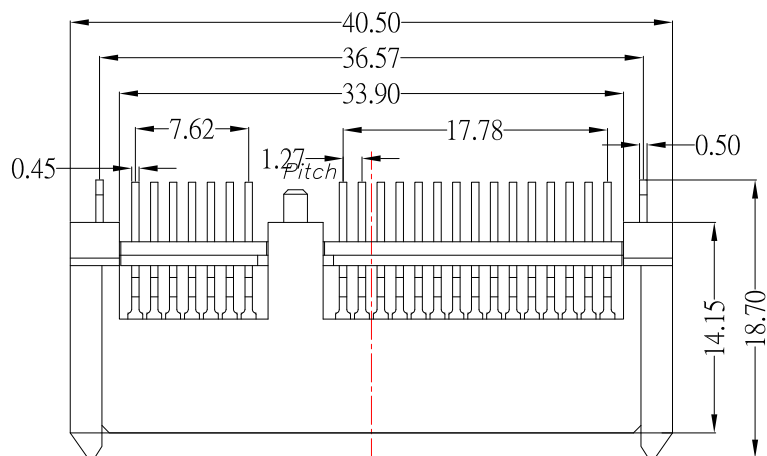
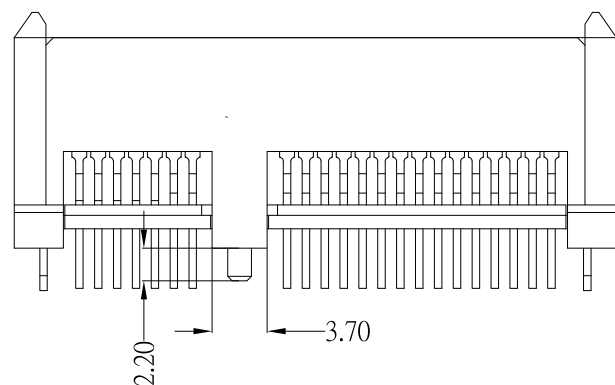
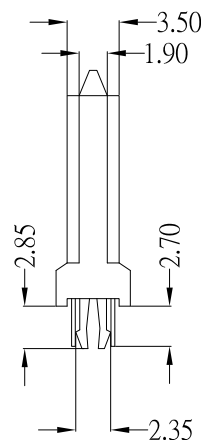


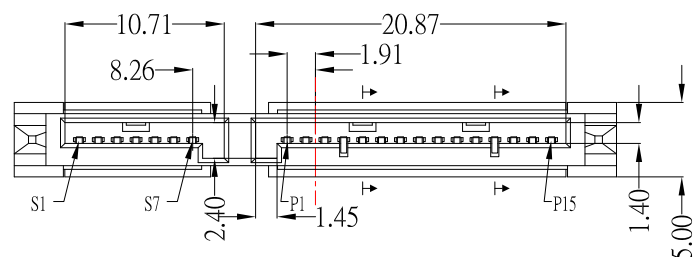

RECOMMENDED PCB LAYOUT



SPECIFICATION:

1.MATERIAL:

1.1 HOUSING: LCP , UL 94V-0 , Black.

1.2 CONTACT: PHOSPHOR BRONZE

1.3 PEG: BRASS

2.Finish:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

2.2 PEG: TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/11/14
DATE: 12/11/14
DATE: 12/11/14

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: CONNECTOR
MODLE: SATA 7+15P 母座 180度 雙排腳 DIP 加高型
DWG NO. : SATA-F22-141VH2-S268
PART NO. : SATA-F22-141VH2-S268

SIZE: A4
VER: R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增尺寸	Jack	121114