



MSIM-0271G06-x-S304

鍍層厚度：

Blank : G/F
3 : 30u"

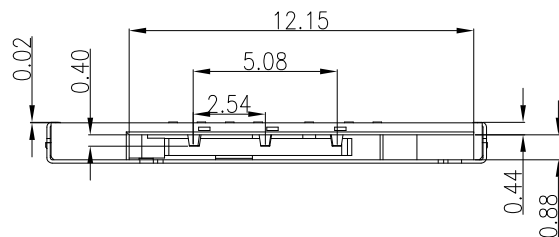

0.50
REF

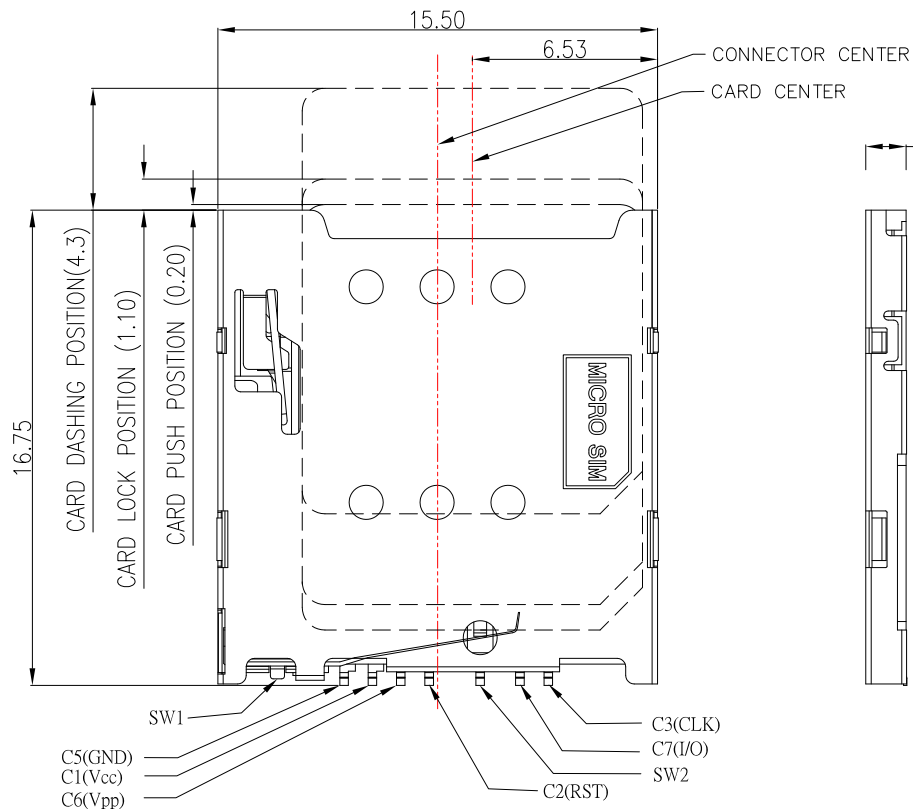

SPECIFICATION

Electrical :

- 1.Current Rating: 0.5A
- 2.Voltage Rating: 5V AC/DC
- 3.Contact Resistance: 100 mΩ Max.
- 4.Insulation Resistance: 1000 MΩ Min.

Environmental:


- 1.Operating Temperature: -40°C ~ +85°C.

Material:

- 1.Housing: LCP
- 2.Contact: Copper Alloy
- 3.Shell: Stainless Steel

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

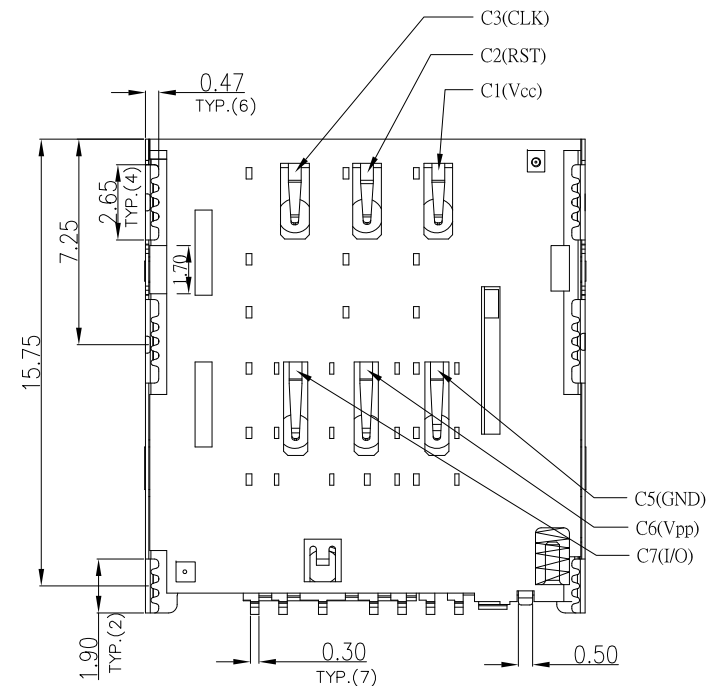

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

04/16/19

CHECKED BY:

Jacky Chen

DATE

04/16/19

APPROVED BY:

Tony Kao

DATE

04/16/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

MICRO SIM PUSH. H142 防呆型

MSIM-0271G06-x-S304

MSIM-0271G06-x-S304

SIZE

A4

VER

R2

2

1

ITEM NO.

更新樣式

新增pin的定義

DESCRIPTION

LAN


Jack

DRAWN

041619

040319

DATE

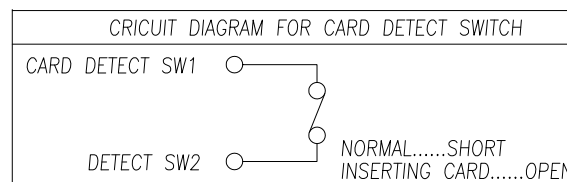

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	04/16/19					
CHECKED BY:	DATE	FINISH		MODLE	MICRO SIM PUSH. H142 防呆型	
Jacky Chen	04/16/19	SCALE	1 : 1	DWG NO.	MSIM-0271G06-x-S304	SIZE
APPROVED BY:	DATE	SHEET NO.	2 of 2	PART NO.	MSIM-0271G06-x-S304	A4
Tony Kao	04/16/19					VER
						R