
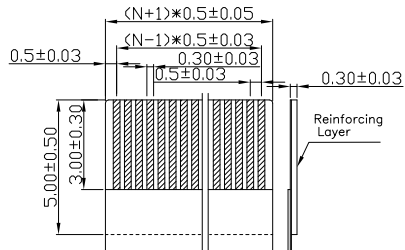
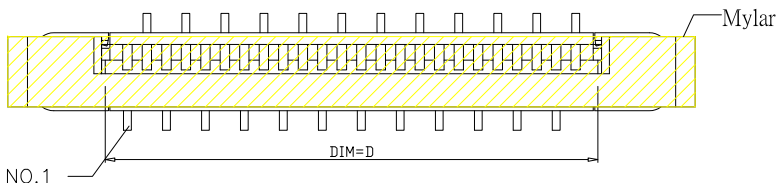
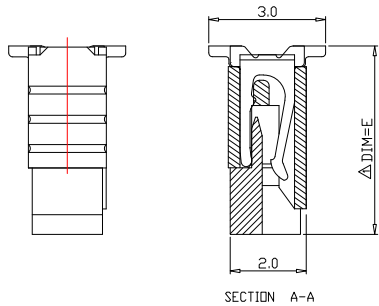


RECOMMENDED PCB LAYOUT

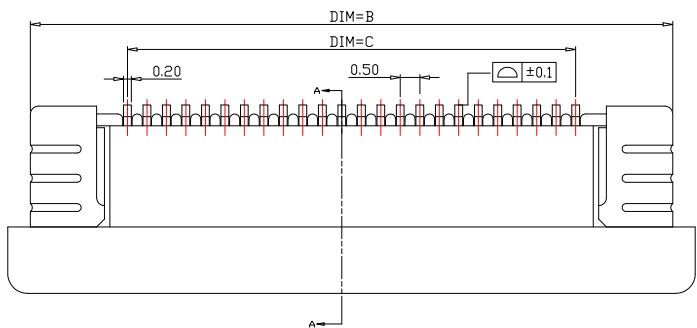

RECOMMENDED FFC/FPC DIM.

PIN NO.	Dimensions				
	A	B	C	D	E
4	7.6	6.5	1.5	2.6	4.4
5	8.1	7.0	2.0	3.1	
6	8.6	7.5	2.5	3.6	
7	9.1	8.0	3.0	4.1	
8	9.6	8.5	3.5	4.6	
9	10.1	9.0	4.0	5.1	
10	10.6	9.5	4.5	5.6	
11	11.1	10.0	5.0	6.1	
12	11.6	10.5	5.5	6.6	
13	12.1	11.0	6.0	7.1	
14	12.6	11.5	6.5	7.6	
15	13.1	12.0	7.0	8.1	
16	13.6	12.5	7.5	8.6	
17	14.1	13.0	8.0	9.1	
18	14.6	13.5	8.5	9.6	
19	15.1	14.0	9.0	10.1	
20	15.6	14.5	9.5	10.6	
21	16.1	15.0	10.0	11.1	
22	16.6	15.5	10.5	11.6	
23	17.1	16.0	11.0	12.1	
24	17.6	16.5	11.5	12.6	
25	18.1	17.0	12.0	13.1	
26	18.6	17.5	12.5	13.6	
27	19.1	18.0	13.0	14.1	
28	19.6	18.5	13.5	14.6	
29	20.1	19.0	14.0	15.1	
30	20.6	19.5	14.5	15.6	
31	21.1	20.0	15.0	16.1	
32	21.6	20.5	15.5	16.6	
33	22.1	21.0	16.0	17.1	
34	22.6	21.5	16.5	17.6	

Material:

1.1 Housing: LCP

1.2 Slider: LCP

1.2 Contact: Phosphor Bronze,Tin Plating Nickel overall

1.3 Fitting Nail: Brass,Tin Plating over Nickel



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

01/21/20

MAT'L

TITLE

CONNECTOR

CHECKED BY:

Jacky Chen

DATE

01/21/20

FINISH

MODLE

0.5 FPC 立式 正脚位

APPROVED BY:

Tony Kao

DATE

01/21/20

SCALE

1 : 1

DWG NO.

FPC05S1-44xx-A-S304

SIZE

A4

VER

R4

SHEET NO.

1 of 1

PART NO.

FPC05S1-44xx-A-S304

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	新增PCB LAYOUR標示	Jack	012120
3	新增Mylar	Jack	052719
2	更新PIN 選項及FFC更新	Jack	082218
1	更新PIN 選項	Jack	050418