

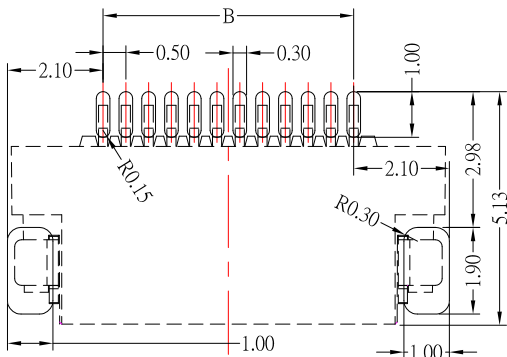


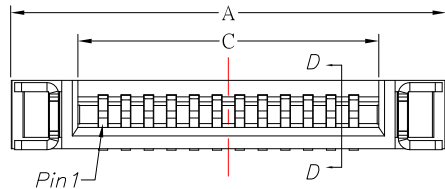
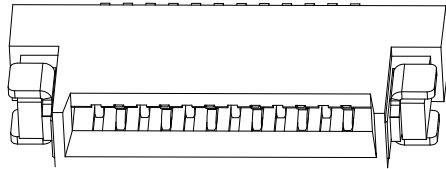
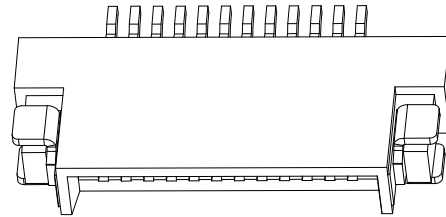


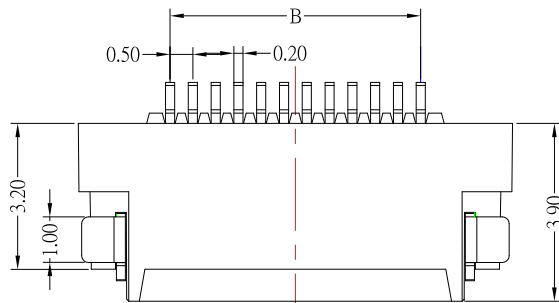

RECOMMENDED PCB LAYOUT

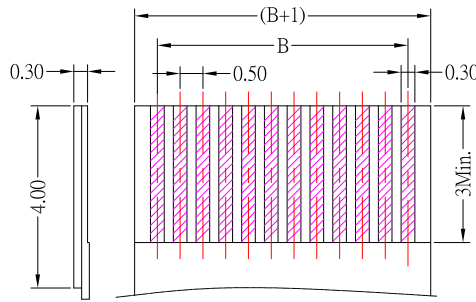

APPLI CABLE FPC

Part No.	Dimension		
	A	B	C
4P	5.53	1.5	2.57
5P	6.03	2.0	3.07
6P	6.53	2.5	3.57
7P	7.03	3.0	4.07
8P	7.53	3.5	4.57
9P	8.03	4.0	5.07
10P	8.53	4.5	5.57
11P	9.03	5.0	6.07
12P	9.53	5.5	6.57
13P	10.03	6.0	7.07
14P	10.53	6.5	7.57
15P	11.03	7.0	8.07
16P	11.53	7.5	8.57
17P	12.03	8.0	9.07
18P	12.53	8.5	9.57
19P	13.03	9.0	10.07
20P	13.53	9.5	10.57
21P	14.03	10.0	11.07
22P	14.53	10.5	11.57
23P	15.03	11.0	12.07
24P	15.53	11.5	12.57
25P	16.03	12.0	13.07
26P	16.53	12.5	13.57
27P	17.03	13.0	14.07
28P	17.53	13.5	14.57
29P	18.03	14.0	15.07
30P	18.53	14.5	15.57
31P	19.03	15.0	16.07
32P	19.53	15.5	16.57
33P	20.03	16.0	17.07
34P	20.53	16.5	17.57

Note:

1.Material

1.1 Housing: LCP, UL94-V0

1.2 Contact: Brass

1.3 Solder Pad: Brass

2.Plating

2.1 Contact: Matte Tin Plating Over Nickel.



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/09/19
DATE: 12/09/19
DATE: 12/09/19

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.

CONNECTOR
0.5mm FPC 雙接 H:1.5mm
1 : 1

PART NO. FPC05D-15xx-N-S304

SIZE: A4
VER: R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新PIN選項	Jack	120919