
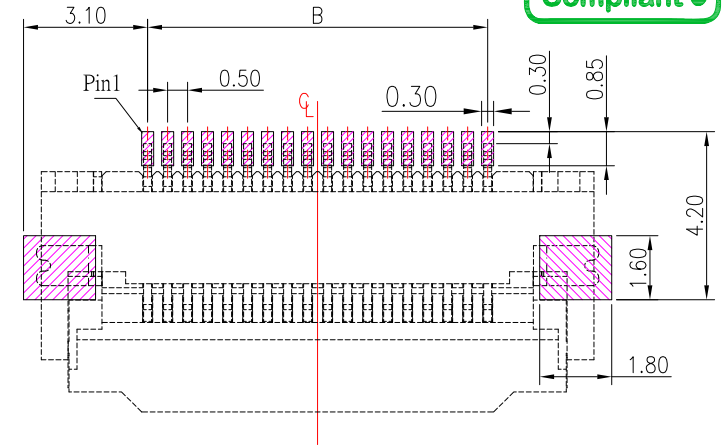



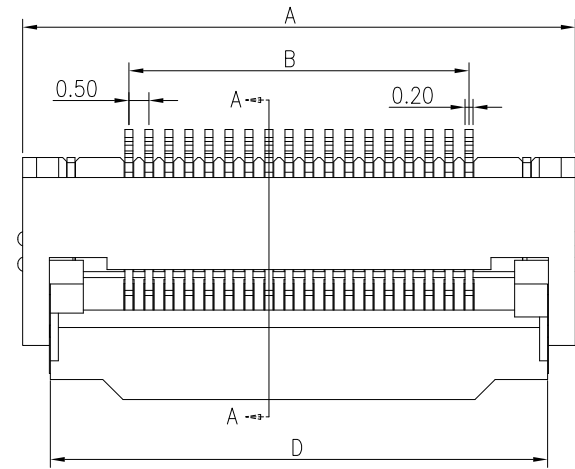

PCB LAYOUT

PIN	Di nensi ons			
	A	B	C	D
10	9.81	4.50	5.57	8.43
15	12.31	7.00	8.07	10.93
17	13.31	8.00	9.07	11.93
18	13.81	8.50	9.57	12.43
22	15.81	10.50	11.57	14.43
25	17.31	12.00	13.07	15.93
28	18.81	13.50	14.57	17.43
30	19.81	14.50	15.57	18.43
32	20.81	15.50	16.57	19.43
36	22.81	17.50	18.57	21.43
40	24.81	19.50	20.57	23.43
54	31.81	26.50	27.57	30.43



NOTES:

1. MATERIAL:


- 1.1 HOUSING: HIGHT-TEMP PLASTIC,COLOR:BEIGE
- 1.2 ACTUATOR: HIGHT-TEMP PLASTIC,COLOR:BLACK
- 1.3 CONTACT: PHOSPHOR BRONZE
- 1.4 FITTING NAIL: BRASS

2. PLATING:


- 2.1 CONTACT: GOLD / TIN PLATED ON NICKEL OVERALL
- 2.2 LEG: TIN PLATED ON NICKEL OVERALL

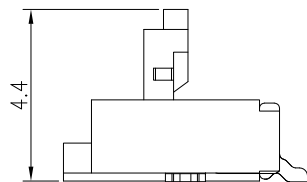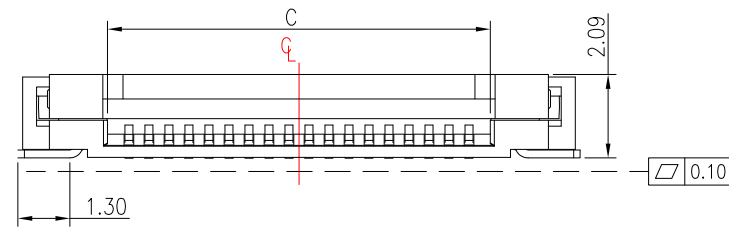

COVER OPEN STATE

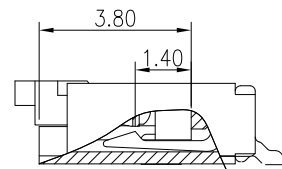

CABLE INSERT DIM.
SECTION: A-A

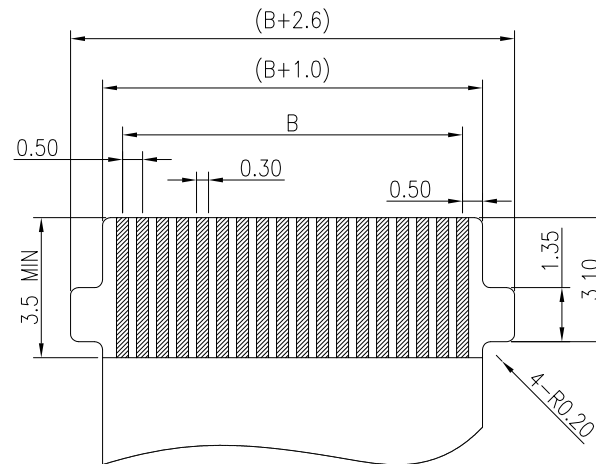

APPLICABLE FPC/FFC



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/15/18
DATE: 05/15/18
DATE: 05/15/18

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
FPC 0.5mm 掀盖式 蝴蝶扣
FPC05L-20xx-B2-S304
FPC05L-20xx-B2-S304

SIZE
A4
VER
R