


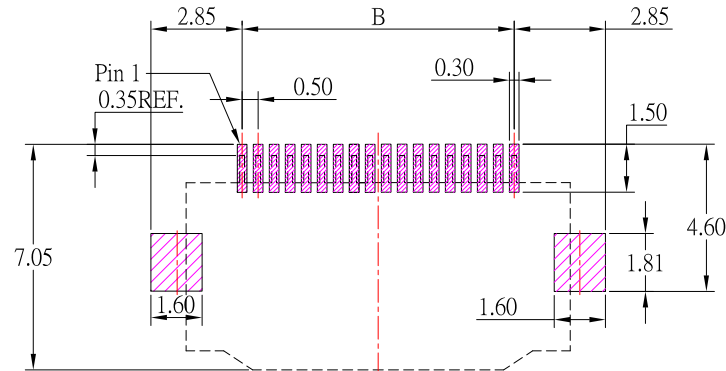
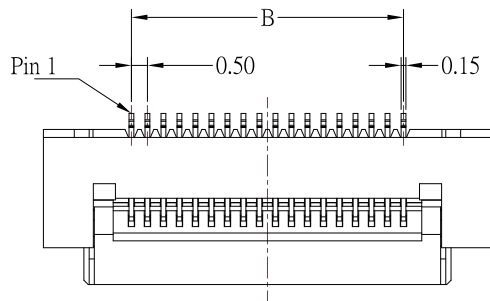
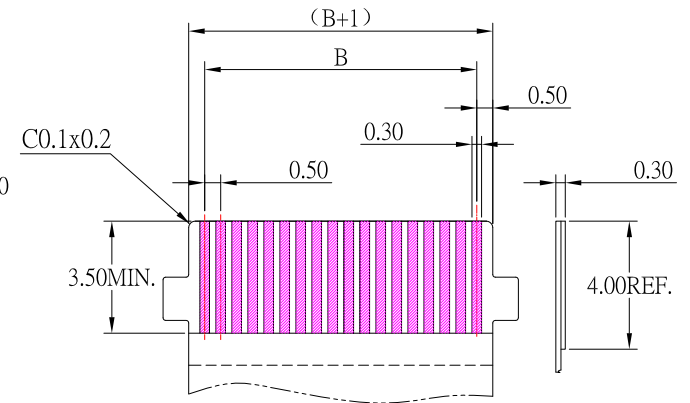




PCB LAYOUT

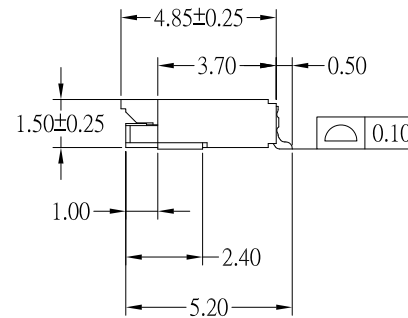

APPLICABLE FPC/FFC

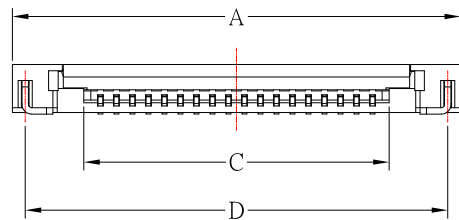

NOTES:

1. MATERIAL:

- 1.1 HOUSING: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:NATURE
- 1.2 COVER: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:BLACK
- 1.3 CONTACT: PHOSPHOR BRONZE
- 1.4 LEG: BRASS

2. PLATING:

- 2.1 CONTACT: TIN PLATED ON NICKEL OVERALL
- 2.2 LEG: TIN PLATED ON NICKEL OVERALL

3. RATING:

- 3.1 CURRENT RATING: 0.5A AC/DC
- 3.2 VOLTAGE RATING: 25V AC/DC
- 3.3 TEMPERATURE RANGE: -25°C~+85°C

Number of Contacts	Dimension			
	A	B	C	D
18	14.00	8.50	9.54	13.20
24	17.00	11.50	11.04	16.20



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 10/23/17

CHECKED BY: Jacky Chen
DATE: 10/23/17

APPROVED BY: Tony Kao
DATE: 10/23/17

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	FPC 0.5mm 掀盖式 蝴蝶扣
SCALE	DWG NO.	FPC05L-15xx-B1-S304
SHEET NO.	PART NO.	FPC05L-15xx-B1-S304

SIZE
A4
VER
R2