


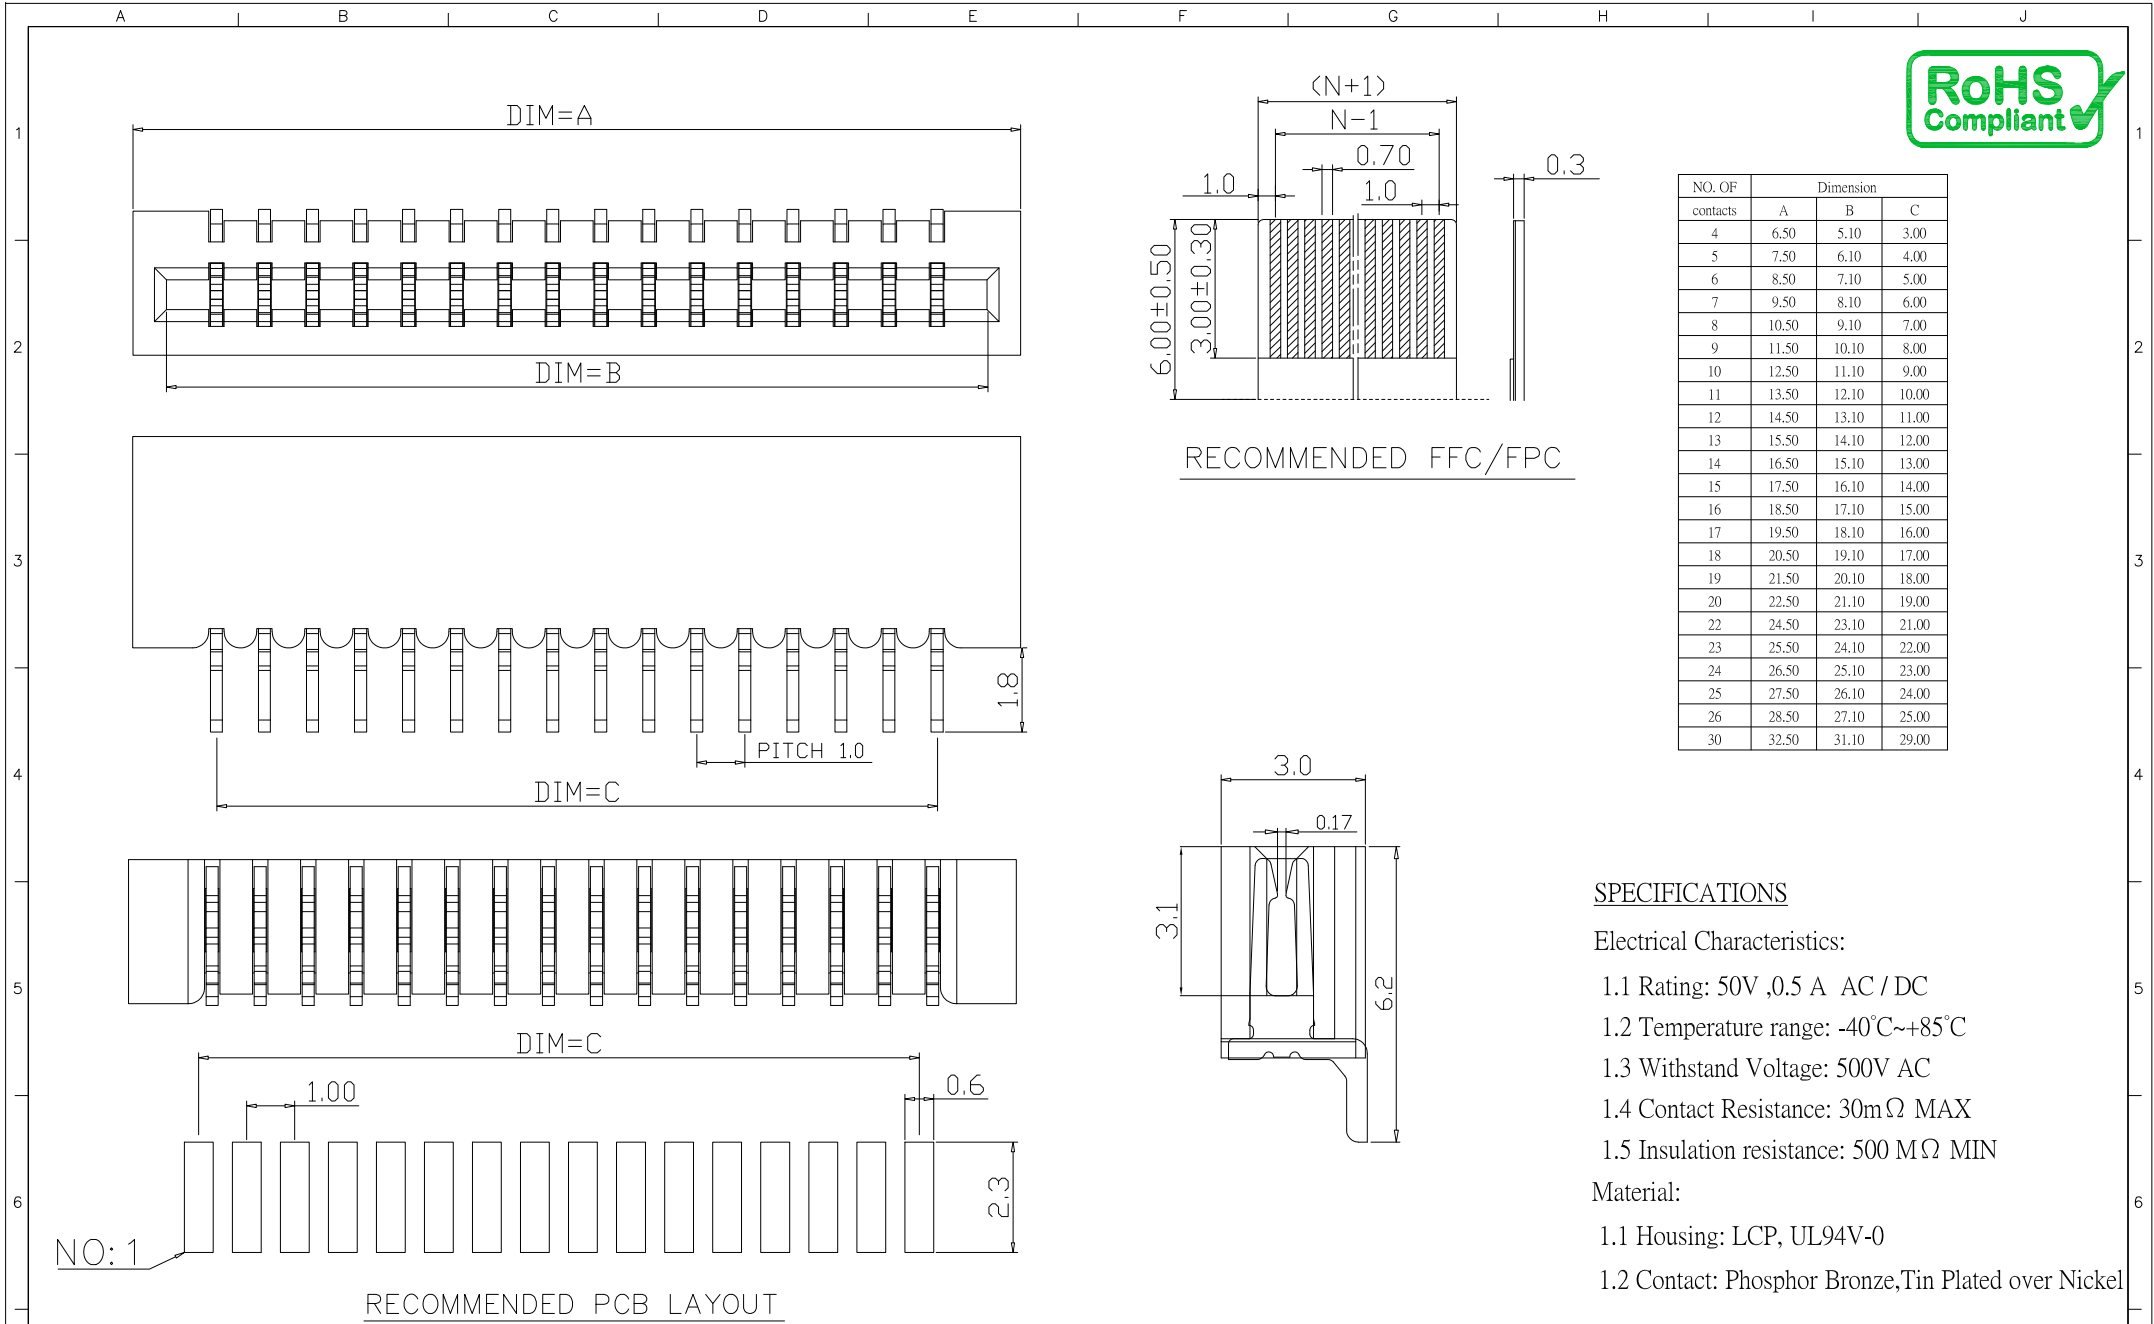

SPECIFICATIONS

Electrical Characteristics:

- 1.1 Rating: 50V ,0.5 A AC / DC
- 1.2 Temperature range: -40°C~+85°C
- 1.3 Withstand Voltage: 500V AC
- 1.4 Contact Resistance: 30mΩ MAX
- 1.5 Insulation resistance: 500 MΩ MIN

Material:

- 1.1 Housing: LCP, UL94V-0
- 1.2 Contact: Phosphor Bronze,Tin Plated over Nickel

7	5	更新樣式	IAN	042319	 东莞市高迪电子有限公司 Dong Guan KDRR Electronic Switch JacK Co., Ltd. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
	4	更新PIN選項	Jack	032918		CHECKED BY:	DATE	FINISH		MODLE	1.0 FPC 雙接90度 DIP	
	3	新增插入深度尺寸	Jack	081117		Jacky Chen	04/23/19	SCALE	1 : 1	DWG NO.	FPC10D-28xx-N-S304	SIZE A4
	2	更新圖面	Jack	082316		APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	FPC10D-28xx-N-S304	VER R5
	1	更新圖面	Jack	061416		Tony Kao	04/23/19					
	ITEM NO.	DESCRIPTION	DRAWN	DATE								
	A	B	C	D		E	F	G	H	I	J	