
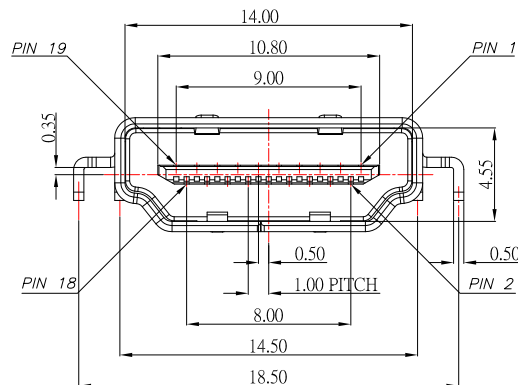
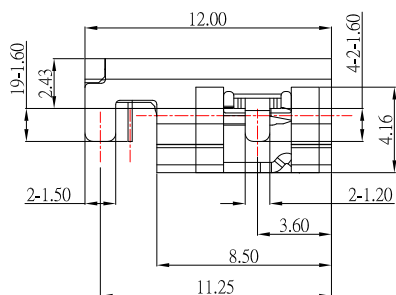
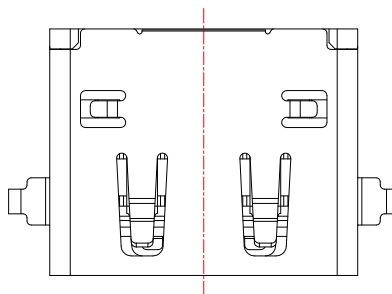


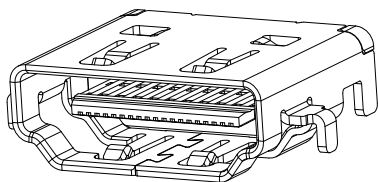


HDMI-19P-D08x-S273

鍍層厚度:



Blank : 1u"

2 : 15u"

3 : 30u"

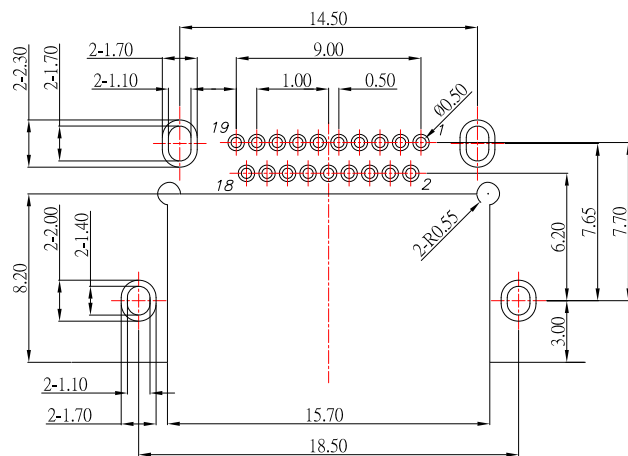

RECOMMENDED PCB LAYOUT(TOP VIEW)

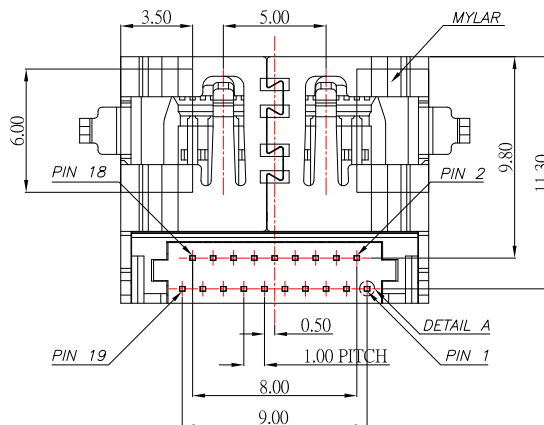

Material:

1.Housing: High Temperature Thermoplastic,UL 94V-0

2. Cover: High Temperature Thermoplastic,UL 94V-0

3.Contact: Phosphor Bronze

4.Shell: Stainless Steel

Finish:

1.Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls ;

Nickel under plated overall

2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

06/10/15

MAT'L

TITLE

CONNECTOR

CHECKED BY:

Jacky Chen

DATE

06/10/15

FINISH

MODLE

HDMI A/F 沉板式 DIP 板上 H:2.43mm

APPROVED BY:

Tony Kao

DATE

06/10/15

SCALE

1 : 1

DWG NO.

HDMI-19P-D08x-S273

SHEET NO.

1 of 1

PART NO.

HDMI-19P-D08x-S273

SIZE

A4

VER

R

ITEM NO.

DESCRIPTION

DRAWN

DATE