
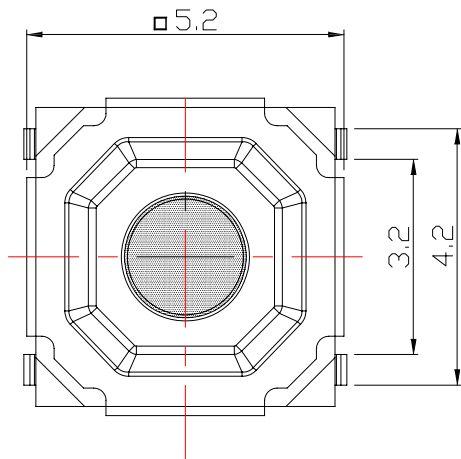
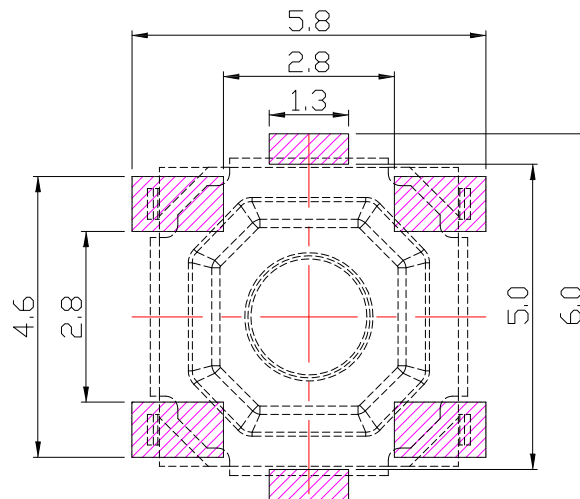


CIRCUIT DIAGRAM

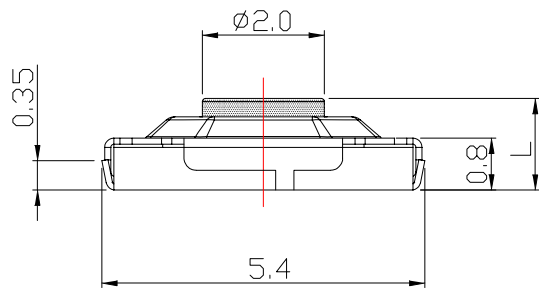

P.C.B. LAYOUT MOUNTING PATTERN

Model No.	L (mm)	STEM MATERIAL
TS-A87PU	1.5	BRASS
TS-A87PUA	4.3	LCP
TS-A87PUB	1.7	LCP
TS-A87PUD	2.3	BRASS
TS-A87PUE	3.0	BRASS

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	2 160 ± 50gf	3 250 ± 50gf	
Operating Life (cycles)	100,000		



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/27/14
DATE: 06/27/14
DATE: 06/27/14

MAT'L
FINISH
SCALE

1 : 1
1 of 1

TITLE
MODLE
DWG NO.

SWITCH
TACT SWITCH
TS-A87PUx-x-S126
TS-A87PUx-x-S126

SIZE
A4
VER
R2