
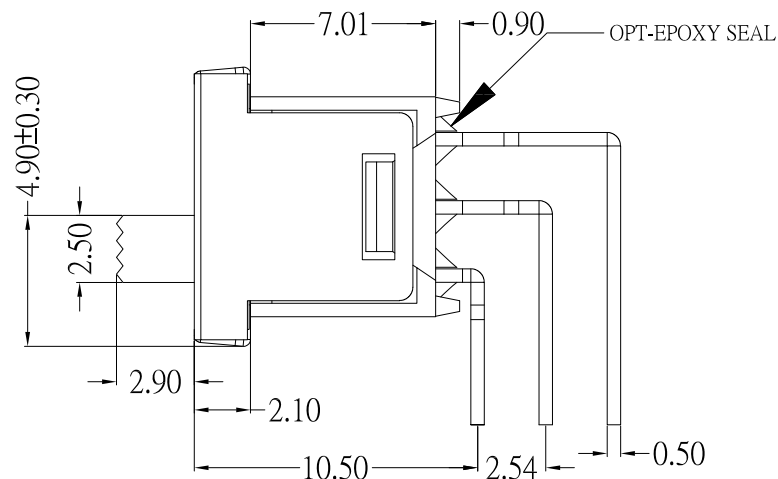
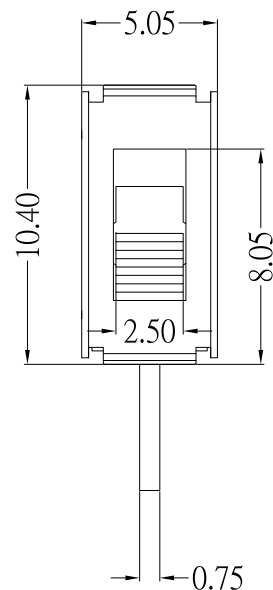


02 Comm.



SCHEMATIC

SPECIFICATIONS:

CONTACT RATING : 3 AMPS @ 120 V AC or 28 V DC.

1 AMPS @ 250 V AC or 0.4VA AMPS @ 20V AC OR DC

ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.

CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 VDC

100 mA , for both silver and gold plated contacts.

INSULATION RESISTANCE : 1,000 MΩ min

DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.

OPERATING TEMPERATURE : -30°C to 130°C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0)

ACTUATOR : Nylon.

HOUSING : Stainless steel.

TERMINAL/CONTACT : Brass , with silver or gold plated.
or gold over silver

SWITCH SUPPORT : Brass , tin plated.

Model No.	TYPE		
DS-10	ON	NONE	ON
DS-11	ON	OFF	ON
Tem. Comm.	2-1	OPEN	2-3



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 04/13/16

CHECKED BY: Jacky Chen
DATE: 04/13/16

APPROVED BY: Tony Kao
DATE: 04/13/16

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

SLIDE SWITCH 端子截齊

DS-1xA4

DS-1xA4

SIZE

A4

VER

R2