
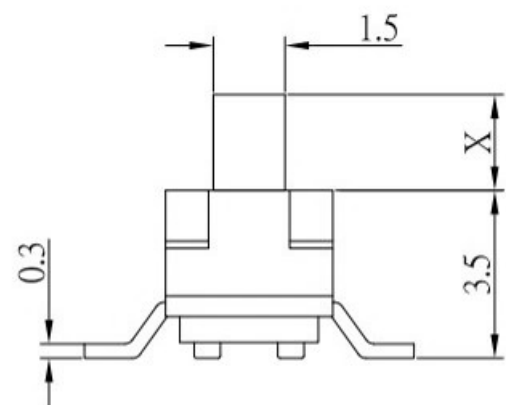


NO	MODEL	KNOB(X)
1	SS-D35S	2.0 mm
2	SS-D35SB	4.0 mm

P.C.B LAND PATTERN

CIRCUIT DIAGRAM

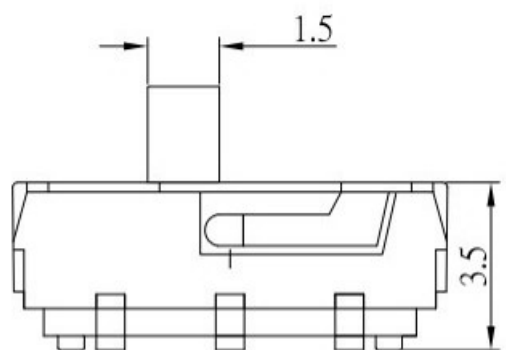

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	100MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	190 ± 50gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新材質	Jack	073014
2	新增高度選項及更新料號	Jack	040814
1	更新Rating	Jack	062813


**东莞市高迪电子有限公司**  
 Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S  

 UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	07/30/14		MODLE	SMT SLIDE SWICTH
CHECKED BY:	DATE	SCALE	DWG NO.	SS-D35Sx-B-S246
Jacky Chen	07/30/14	1 : 1	PART NO.	SS-D35Sx-B-S246
APPROVED BY:	DATE	SHEET NO.		
Tony Kao	07/30/14	1 of 1		