

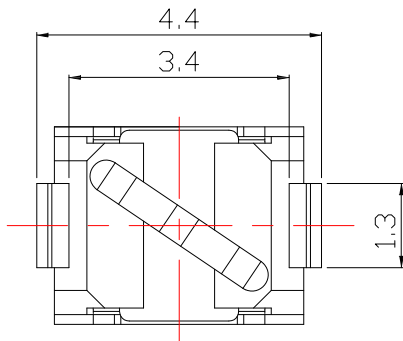

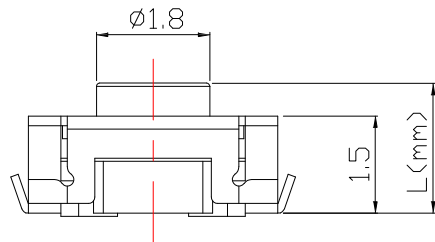
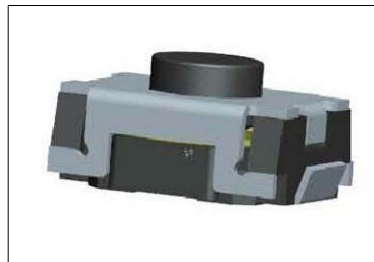


CIRCUIT DIAGRAM



MODEL NO.	TS-A85U	TS-A85AU
L (mm)	2.0	2.5

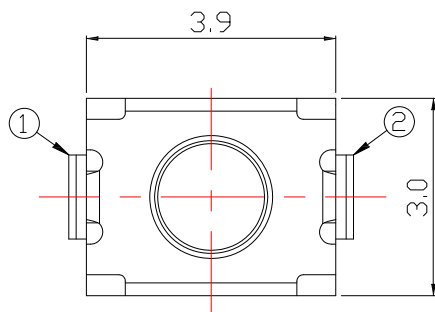

P.C.B. LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.15 ± 0.1mm		
Operating Force	2	160 ± 30gf	3 250 ± 50gf
Operating Life(cycles)	100,000		



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
07/08/15
DATE
07/08/15
DATE
07/08/15

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A85xU-x-S126
TS-A85xU-x-S126

SIZE
A4
VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新travel	Jack	070815
1	删除1.80高度选项	Jack	110714