


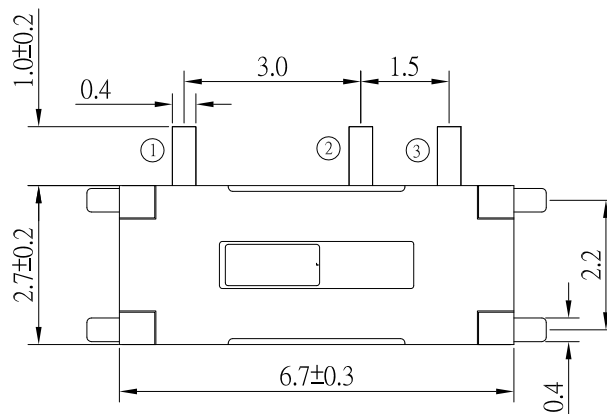


P.C.B LAND PATTERN

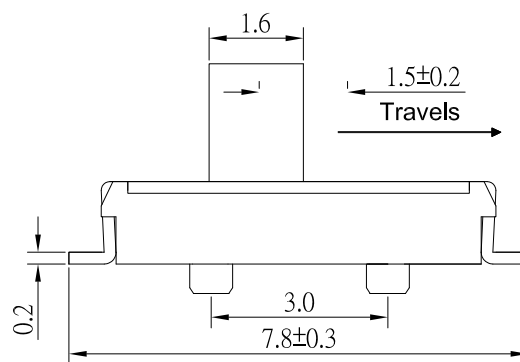

CIRCUIT DIAGRAM

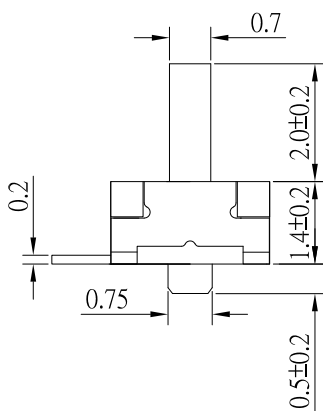

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	100MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	160 ± 50gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
F	CONTACT	1	BECU	Ag plated
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	SUS	
C	COVER	1	BRASS	Ag plated
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	

ITEM NO.	DESCRIPTION	DRAWN	DATE
7	更新料號	Jack	091916
6	更新料號	Jack	070413
5	更新料號	Jack	062813
4	更新Rating	Jack	080117
3	更新料號	Jack	091916
2	更新料號	Jack	070413
1	更新Rating	Jack	062813



东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	04/09/19		MODLE	SMT SLIDE SWICTH 平柄 柄寬:1.6*2.0
CHECKED BY:	DATE	FINISH	DWG NO.	SS-B95A-W-S246
Jacky Chen	04/09/19	SCALE	1 : 1	PART NO. SS-B95A-W-S246
APPROVED BY:	DATE	SHEET NO.	1 of 1	SIZE A4
Tony Kao	04/09/19	VER	R7	