

CIRCUIT DIAGRAM



P.C.B LAND PATTERN

SS-B70-x-S246

SLIDER COLOR :

Black : B

White : W

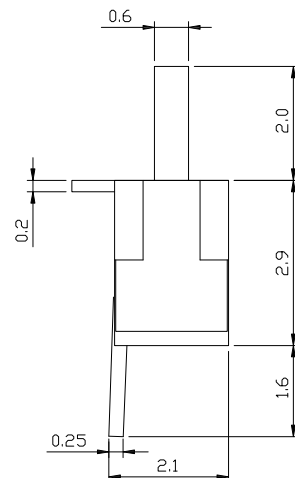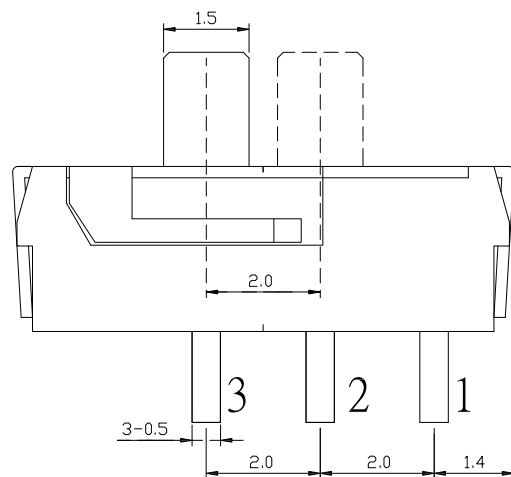

SPECIFICATIONS

| | |
|---------------------------------|--------------------|
| Rating | 0.3A 6V DC |
| Insulation Resistance | 50MΩ Min. |
| Dielectric Withstanding Voltage | AC 250 V(50Hz)1min |
| Contact Resistance | 100mΩ Max. |
| Operating Force | 130 ± 50gf |
| Operating Life | 10,000 cycles |

| NO. | DESCRIPTION | QTY | MATERIAL | PLATING |
|-----|-------------|-----|-----------------|-----------|
| E | TERMINAL | 3 | PHOSPHOR BRONZE | Ag plated |
| D | CLIP | 1 | BeCu | Ag plated |
| C | COVER | 1 | STAINLESS STEEL | |
| B | CASE | 1 | PA6T | Black |
| A | SLIDER | 1 | PPA | |

| | | | |
|----------|-------------------|-------|--------|
| 9 | 更新CIRCUIT DIAGRAM | Jack | 011020 |
| 8 | 更新CIRCUIT DIAGRAM | Jack | 010920 |
| 7 | 更新為A0版 | Jack | 080417 |
| 6 | 新增PIN編號 | Jack | 030816 |
| 5 | 更新顏色選項 | Jack | 101415 |
| 4 | 更新圖面 | Jack | 102114 |
| 3 | 更新材質及SPEC | Jack | 110613 |
| 2 | 更新材質 | Jack | 103113 |
| 1 | 更新圖面視圖位置 | Jack | 102313 |
| ITEM NO. | DESCRIPTION | DRAWN | DATE |



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

| | |
|--------------|----------|
| DRAWN BY: | DATE |
| Jack Lu | 01/10/20 |
| CHECKED BY: | DATE |
| Jacky Chen | 01/10/20 |
| APPROVED BY: | DATE |
| Tony Kao | 01/10/20 |

| | | |
|-----------|--------|------------------------|
| MAT'L | TITLE | SWITCH |
| FINISH | MODLE | SLIDE SWICTH |
| SCALE | 1 : 1 | DWG NO. SS-B70-x-S246 |
| SHEET NO. | 1 of 1 | PART NO. SS-B70-x-S246 |
| | | SIZE A4 |
| | | VER A2 |