

P.C.B LAND PATTERN



SS-B50x-x-S246

| MODEL   | X(mm) |
|---------|-------|
| SS-B50  | 2.0   |
| SS-B50A | 3.0   |
| SS-B50C | 4.0   |

SLIDER COLOR :


Black : B

White : W

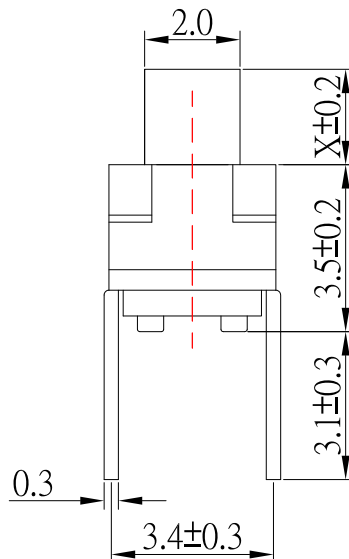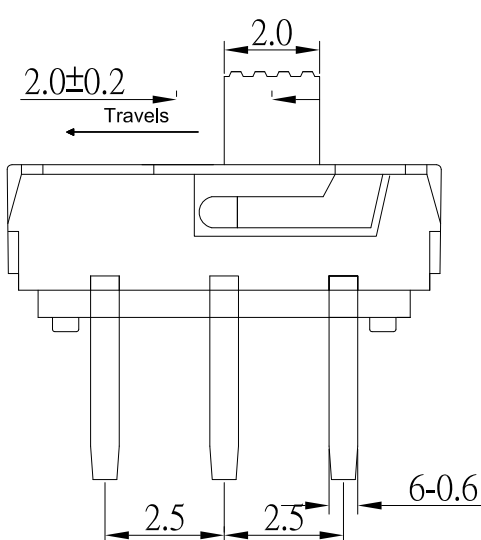

## SPECIFICATIONS

|                                 |                    |
|---------------------------------|--------------------|
| Rating                          | 0.3A 6V DC         |
| Insulation Resistance           | 50MΩ Min.          |
| Dielectric Withstanding Voltage | AC 250 V(50Hz)1min |
| Contact Resistance              | 100mΩ Max.         |
| Operating Force                 | 200 ± 50gf         |
| Operating Life                  | 10,000 cycles      |



|     |             |     |                 |           |
|-----|-------------|-----|-----------------|-----------|
| E   | TERMINAL    | 6   | PHOSPHOR BRONZE | Ag plated |
| D   | CLIP        | 2   | BECU            | Ag plated |
| C   | COVER       | 1   | SUS             |           |
| B   | CASE        | 1   | PA6T            | Black     |
| A   | SLIDER      | 1   | PA46            | Black     |
| NO. | DESCRIPTION | QTY | MATERIAL        | PLATING   |



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY:  
Jack Lu

DATE  
12/10/18

CHECKED BY:  
Jacky Chen

DATE  
12/10/18

APPROVED BY:  
Tony Kao

DATE  
12/10/18

MAT'L

TITLE

SWITCH

FINISH

MODLE

SLIDE SWICTH

SCALE

1 : 1

DWG NO.

SS-B50x-x-S246

SIZE

A4

SHEET NO.

1 of 1

PART NO.

SS-B50x-x-S246

VER

R4

| ITEM NO. | DESCRIPTION | DRAWN | DATE   |
|----------|-------------|-------|--------|
| 4        | 更新圖面        | Jack  | 121018 |
| 3        | 更新材質        | Jack  | 061015 |
| 2        | 更新高度代碼      | Jack  | 060515 |
| 1        | 新增高度選項      | Jack  | 032514 |