
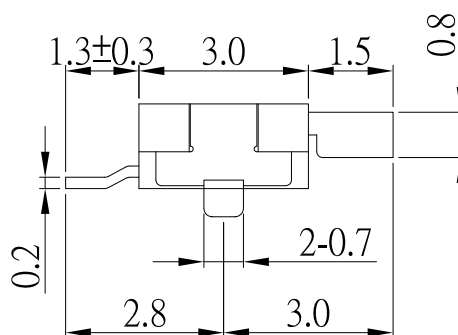
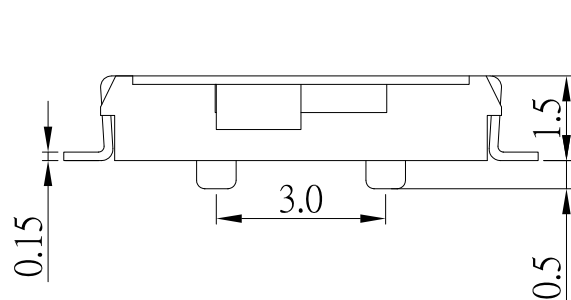
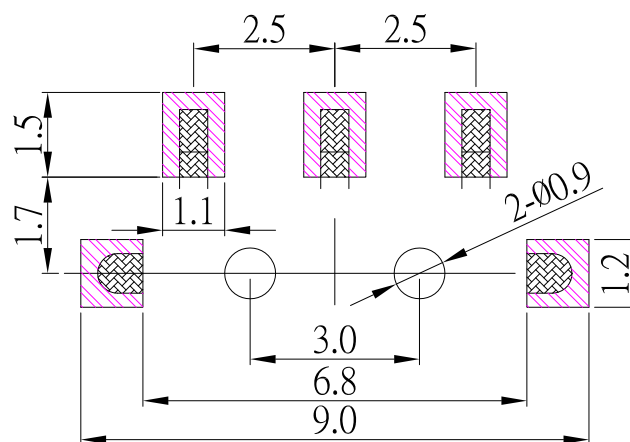


CIRCUIT DIAGRAM

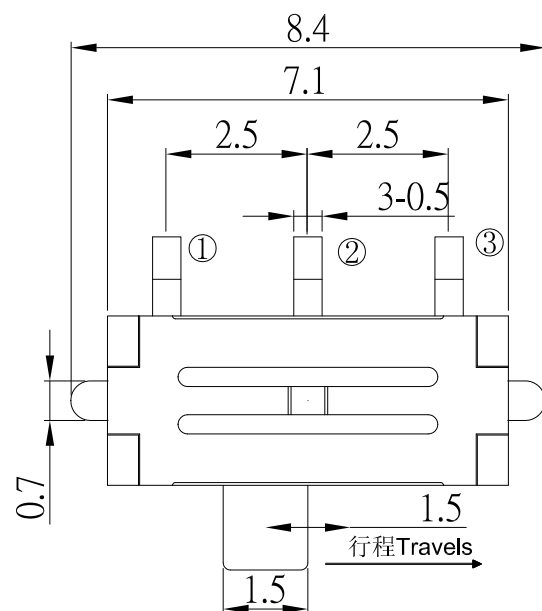

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	DC 12V 0.1A
Contact Resistance	100mΩ Max
Insulation Resistance	100MΩ Min
Operating Force	160 ±50gf
Life	10,000 cycles

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
06/09/17

CHECKED BY:
Jacky Chen

DATE
06/09/17

APPROVED BY:
Tony Kao

DATE
06/09/17

MAT'L

TITLE
SWITCH

FINISH

MODLE
SLIDE SWITCH

SCALE

1 : 1

DWG NO.
SS-B00-S246

SIZE
A4

SHEET NO.

1 of 1

PART NO.
SS-B00-S246

VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新圖面	Jack	060917
1	新增尺寸	Jack	052715