


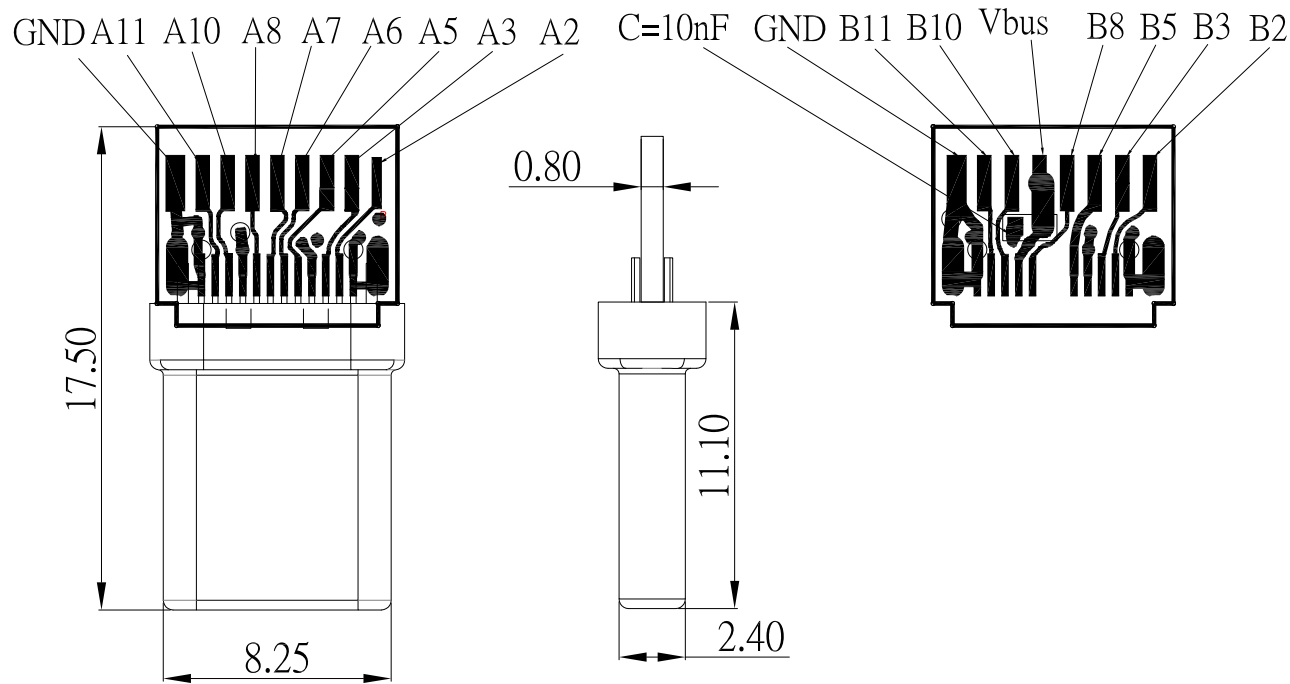

SBC-241PL16-31x-S271

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

Electrical:


- Rating: 3.0A
- Contact Resistance: 40 mΩ Max
- Insulation Resistance: 100 MΩ Min
- Dielectric Withstanding Voltage: 100V AC

Material:

- Housing: LCP
- Contact: Copper Alloy
- Shell: SUS

Finish:

- Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- Shell: Nickel under Plated surface layer

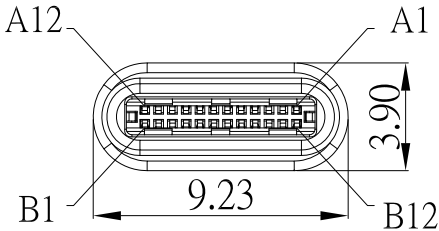

前端接口



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	04/05/17				
CHECKED BY:	DATE	FINISH		MODLE	USB 3.1 TYPE C 公頭拉伸帶板 帶帶電容10nF L11.10
Jacky Chen	04/05/17				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	SBC-241PL16-31x-S271
Tony Kao	04/05/17				
		SHEET NO.	1 of 1	PART NO.	SBC-241PL16-31x-S271

SIZE	A4
VER	R