






DIMENSIONS

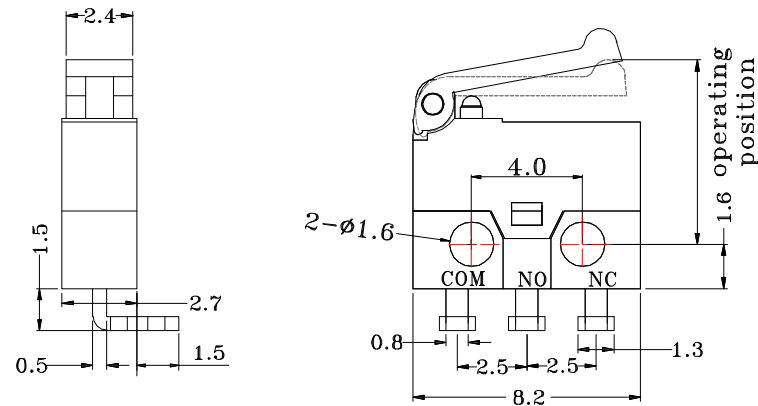

CIRCUIT

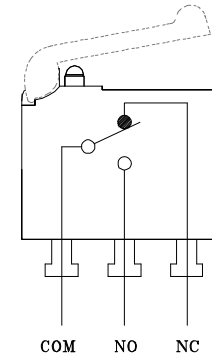

P.C.B LAYOUT MOUNTING PATTERN

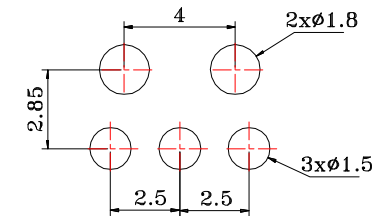

Specifications

Specifications			Material		
1	Rating	30 VDC / 500mA	1	Terminal	Brass , Silver Plated
2	Operating Force	50 gf Max	2	Body	PBT
3	Life	300,000 cycles Min	3	Cover	POM
4	Operating Position	6.7mm ± 0.5mm	4	Level	POM
5	Contact Resistance	100 m ohms Max(Initial)	5	Pin	POM
6	Insulation Resistance	100 M ohms Min(at 250VDC)	6	Contact	Phosphor Bronze , Silver Plated
7	Dielectric withstanding voltage	500VAC 1 minute			
8	Operating temperature	-25°C ~ +70°C			
9	Ambient humidity	35% ~ 85% RH			
10	Maifunction durability	10 to 55 Hz 1.5mm double amplitude during 2 hours			

Material



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 12/16/15

CHECKED BY: Jacky Chen
DATE: 12/16/15

APPROVED BY: Tony Kao
DATE: 12/16/15

MAT'L		TITLE	SWITCH
FINISH		MODLE	MICRO SWITCH
SCALE	1 : 1	DWG NO.	SSM-001R
SHEET NO.	1 of 1	PART NO.	SSM-001R

SIZE	A4
VER	R1