



SBC-240M8-31x-S338

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

Electrical:

- 1.Rating: 5.0 A for VBUS
0.25A for other
- 2.Dielectric Withstand Voltage: 100V AC
- 3.Contact Resistance: 40 mΩ Max
- 4.Insulation Resistance: 100 MΩ Min

Mechanical:



- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP,UL 94V-0
- 2.Contact: BRASS
- 3.Shell: SUS



Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

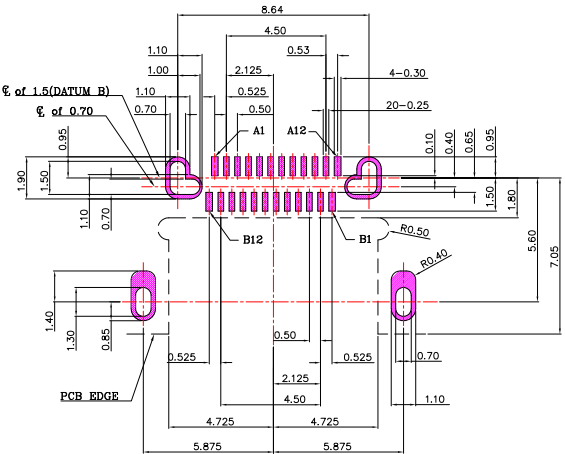



RECOMMENDED P.C.B. LAYOUT


PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTxp1	Positive half of first SuperSpeed TX differential pair	B11	SSRxp1	Positive half of first SuperSpeed RX differential pair
A3	SSTxm1	Negative half of first SuperSpeed TX differential pair	B10	SSRxm1	Negative half of first SuperSpeed RX differential pair
A4	Vas	Bus Power	B9	Vas	Bus Power
A5	CC1	Configuration Channel	B8	SBW2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dm2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dm1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	Vas	Bus Power	B4	Vas	Bus Power
A10	SSRxm2	Negative half of second SuperSpeed RX differential pair	B3	SSTxm2	Negative half of second SuperSpeed TX differential pair
A11	SSRxp2	Positive half of second SuperSpeed RX differential pair	B2	SSTxp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return




SECTION A-A
SCALE: 1:1

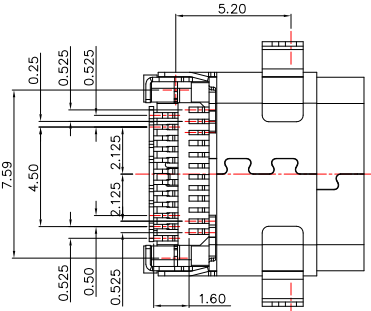

SECTION E-E
SCALE: 1:1

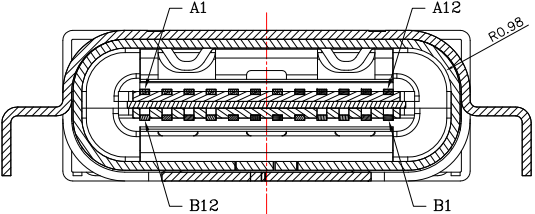

SECTION G-G
SCALE: 2:1

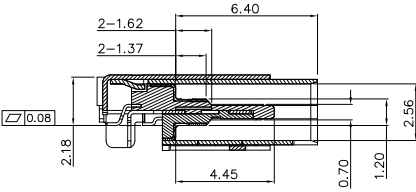

SECTION I-I
SCALE: 1:1



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
01/21/19

MAT'L

TITLE
CONNECTOR

CHECKED BY:
Jacky Chen

DATE
01/21/19

FINISH

MODLE

USB 3.1 TYPE C 母座沉板, 板上 H2.28mm

APPROVED BY:
Tony Kao

DATE
01/21/19

SCALE

1 : 1

DWG NO.

SBC-240M8-31x-S338

SIZE
A4
VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新底部樣式	Jack	012119
1	更新材質	Jack	063016