


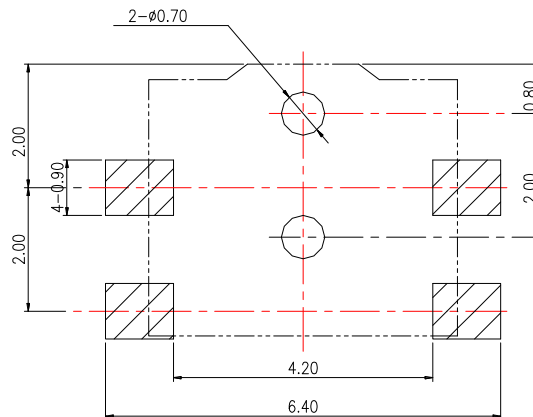
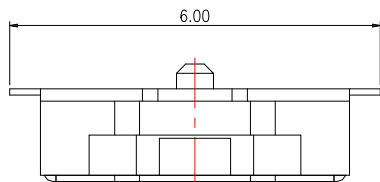




P.C.B. LAYOUT
(VIEW FROM THE DIRECTION A)

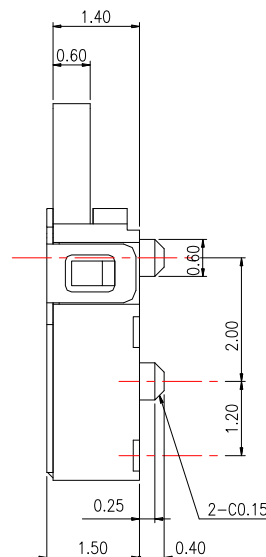

CIRCUIT DIAGRAM

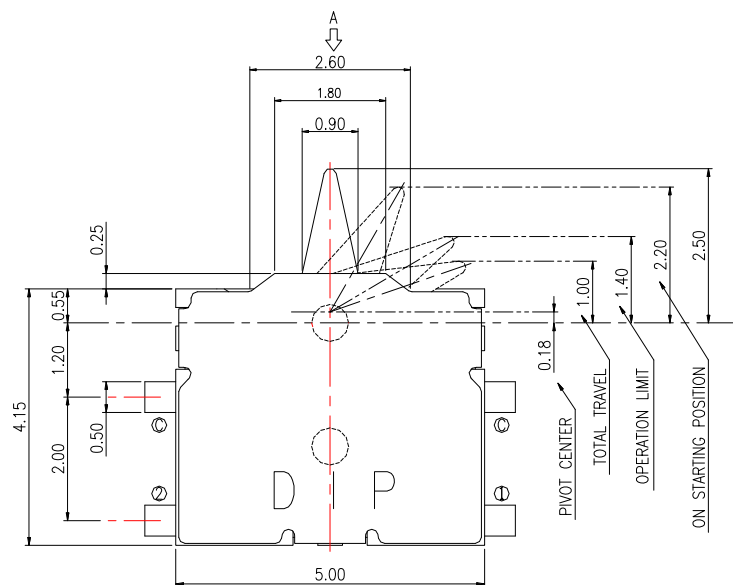

SPECIFICATIONS

- 1.RATING: DC 5V,10mA
- 2.CONTACT RESISTANCE: 500mΩ Max.
- 3.INSULATION RESISTANCE: 100MΩ Min.
- 4.WITHSTAND VOLTAGE: 100VAC / minute.
- 5.OPERATING FORCE: 30gf Max
- 6.STOKE: 1.5±0.3mm
- 7.OPERATING LIFE CYCLE: 100,000 CYCLES.



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 08/20/13
DATE: 08/20/13
DATE: 08/20/13

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: DETECTOR SWITCH
DWG NO.: DS-C30E-HF-S008
PART NO.: DS-C30E-HF-S008

SIZE: A4
VER: R

ITEM NO. DESCRIPTION DRAWN DATE