



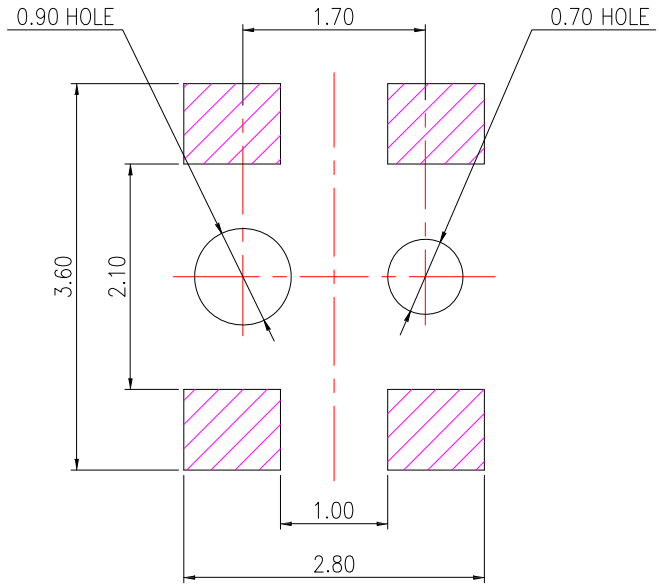




SPECIFICATIONS

- 1.RATING: DC 5.0V,1.0mA
- 2.CONTACT RESISTANCE: 2Ω Max.
- 3.INSULATION RESISTANCE: 100MΩ Min.
- 4.WITHSTAND VOLTAGE: AC 100V-1 MINUTE.
- 5.OPERATING FORCE: 50gf Max.
- 6.OPERATING LIFE CYCLE: 100,000 CYCLES.

CIRCUIT



P.C.B. LAYOUT
(VIEW FROM THE DIRECTION A)

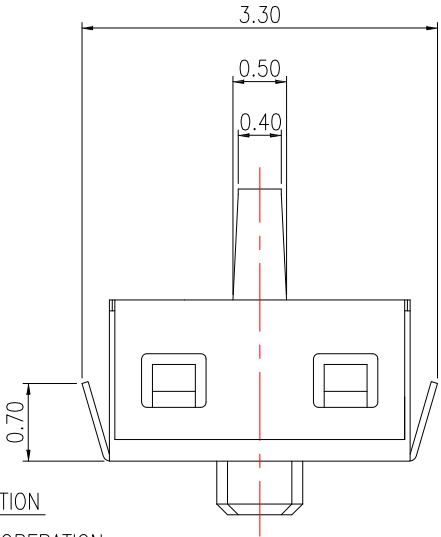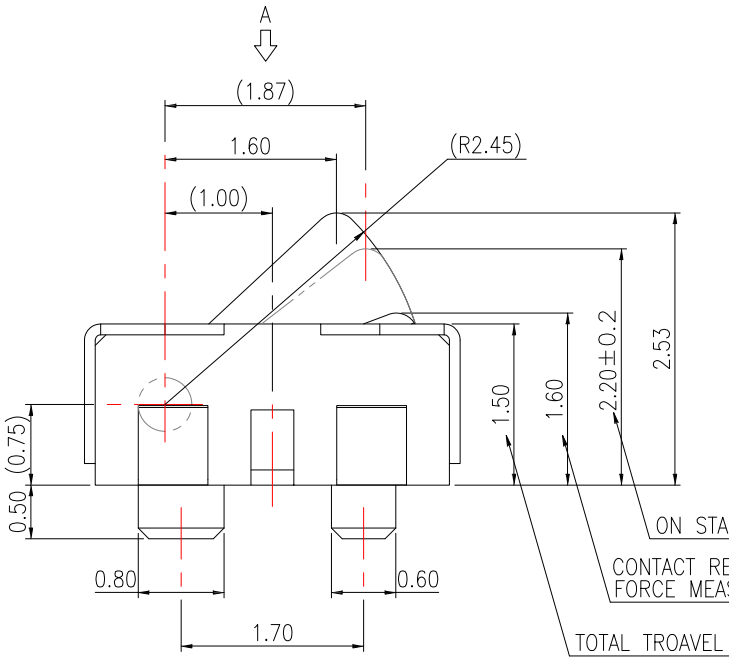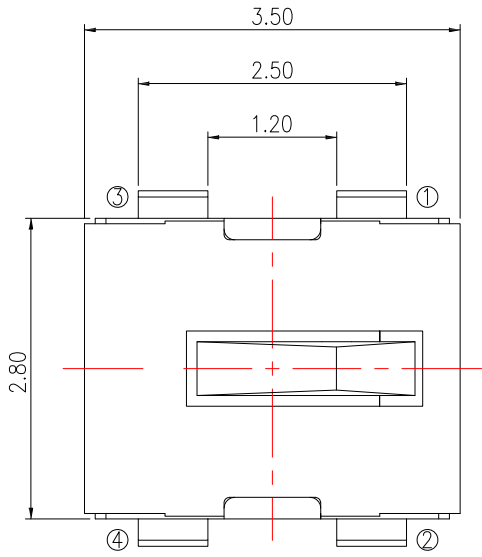

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	04/01/14			
CHECKED BY:	DATE	FINISH	MODLE	DETECTOR SWITCH
Jacky Chen	04/01/14			
APPROVED BY:	DATE	SCALE	DWG NO.	DS-C20E-S008
Tony Kao	04/01/14	1 : 1		
		SHEET NO.	PART NO.	DS-C20E-S008
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	新增SPEC	Jack	040114
2	變更為AO版	Jack	011514
1	新增尺寸公差	Jack	052713