



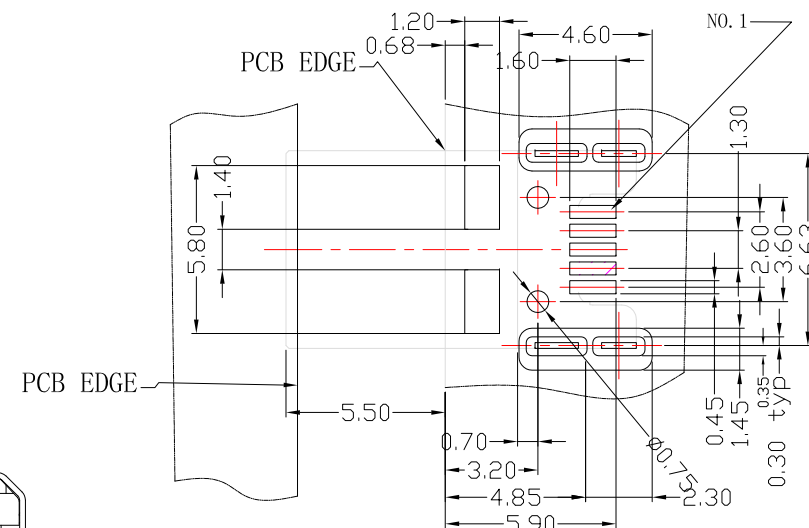

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATION:

1. RATING: 1.0 A , 30VAC
2. DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1min
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 100 MΩ MIN.
5. LIFE: 5,000 CYCLES
6. TEMPERATURE RANGE: -30°C ~ +80°C

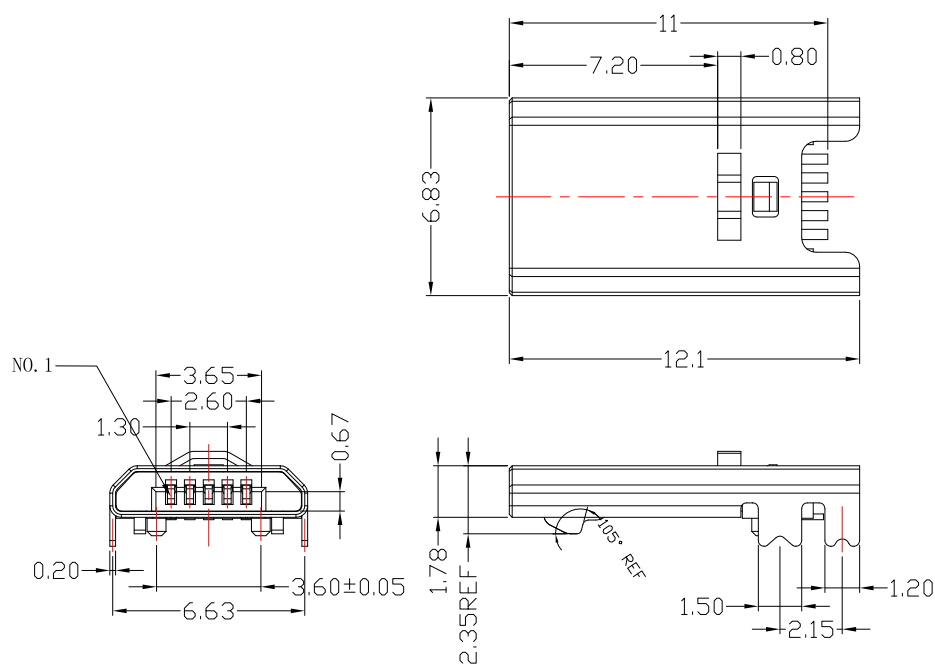

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/19/17
DATE: 05/19/17
DATE: 05/19/17

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MICRO USB 5 P 公頭貼板反向
MRUSB-5PLM5-S235
MRUSB-5PLM5-S235

SIZE: A4
VER: R