


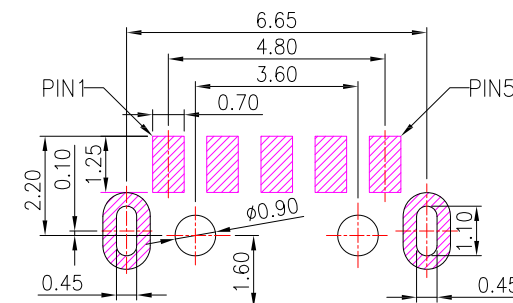

PCB LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Current Rating: 2.0 A(Pin1,Pin5) / 1.0 A(Pin2,3,4)
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Insulation Resistance: 100 MΩ Min

Environmental:

- 1.Operarng Temperature: -40℃ ~ 85℃

Pin Assignments

Contact No.	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
SHELL	Shield



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 12/10/18

CHECKED BY: Jacky Chen
DATE: 12/10/18

APPROVED BY: Tony Kao
DATE: 12/10/18

MATL	TITLE	CONNECTOR
FINISH	MODLE	MICRO USB 5 P 公頭貼板反向
SCALE	DWG NO.	MRUSB-5PLM3-S235
SHEET NO.	PART NO.	MRUSB-5PLM3-S235

SIZE
A4
VER
R3