









MRUSB-5B-RV6x-S331

SHELL鍍層:

TN

NI

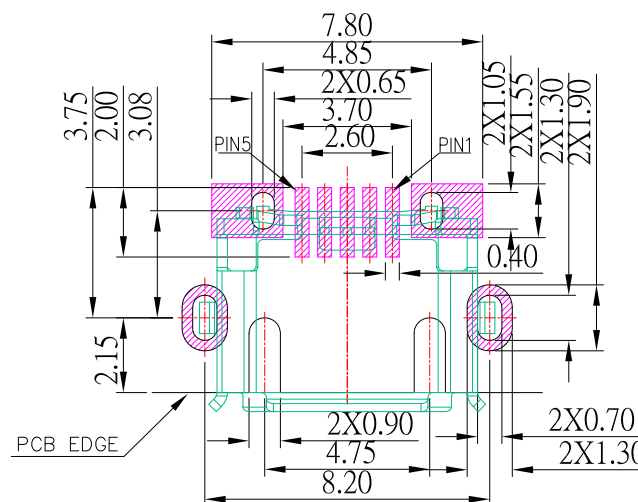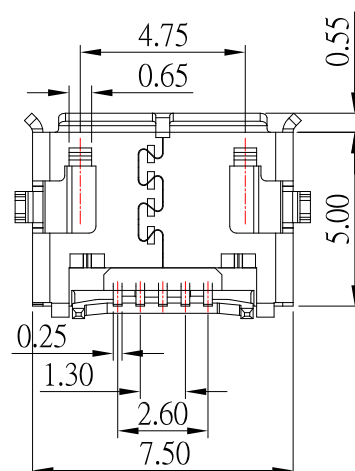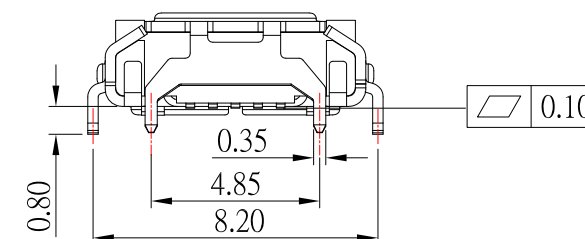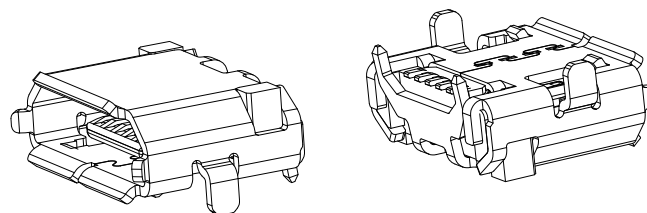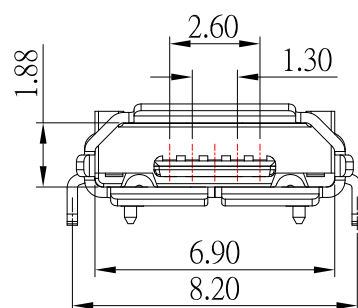

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: LCP,Black

1.2 CONTACT: BRASS

1.3 SHELL: SUS

Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls

Nickel under plated overall

2.2 Shell: Tin under Plated surface layer

3.SPECIFICATION:

3.1 RATING: 30V AC , 0.5 A(2,3,4 pin) ; 1.8 A(1,5 pin)

3.2 DIELECTRIC WITHSANDING VOLTAGE: 250 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TEMPERATURE RANGE: -30°C ~ +85°C



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 02/25/19
DATE: 02/25/19
DATE: 02/25/19

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	MICRO USB 反向 外壳4 脚插板 (PH8.2-4.85mm)
SCALE	1 : 1	DWG NO. MRUSB-5B-RV6x-S331
SHEET NO.	1 of 1	PART NO. MRUSB-5B-RV6x-S331

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增SHELL鍍層選項及更新pcb layout	Jack	022519