

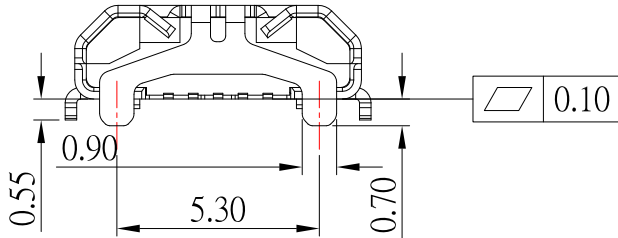




MRUSB-5B-RV4x-S331

SHELL鍍層:

TN
NI

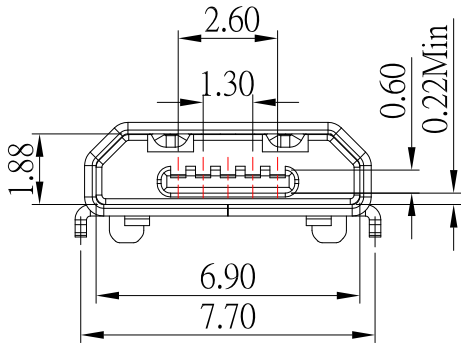

NOTES:

MATERIAL:

1.1 HOUSING: LCP,UL94V-0 ,Black

1.2 CONTACT: BRASS

1.3 SHELL: SUS

Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls

Nickel under plated overall

2.2 Shell: Nickel under Plated surface layer or

Tin under Plated surface layer

3.SPECIFICATION:



3.1 RATING: 100V AC , 1.0 A MAX

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 200 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TEMPERATURE RANGE: -30°C ~ +85°C

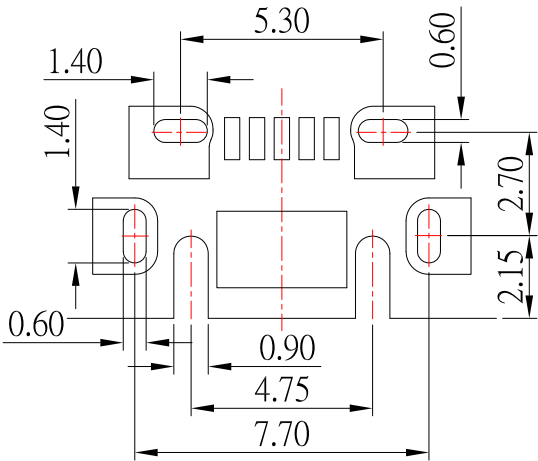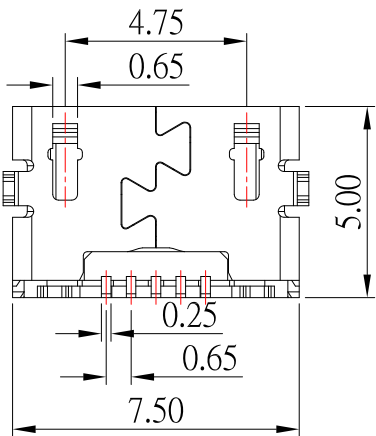

P.C.B LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 12/22/15
DATE: 12/22/15
DATE: 12/22/15

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 反向平口 外壳4 脚插板 (PH:7.7-5.3mm)
SCALE	1 : 1	DWG NO.	MRUSB-5B-RV4x-S331
SHEET NO.	1 of 1	PART NO.	MRUSB-5B-RV4x-S331
			SIZE A4
			VER R