









MRUSB-5B-M15Ax-S347

SHELL鍍層:

TN
NI

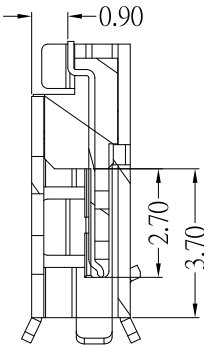

剖面 A-A

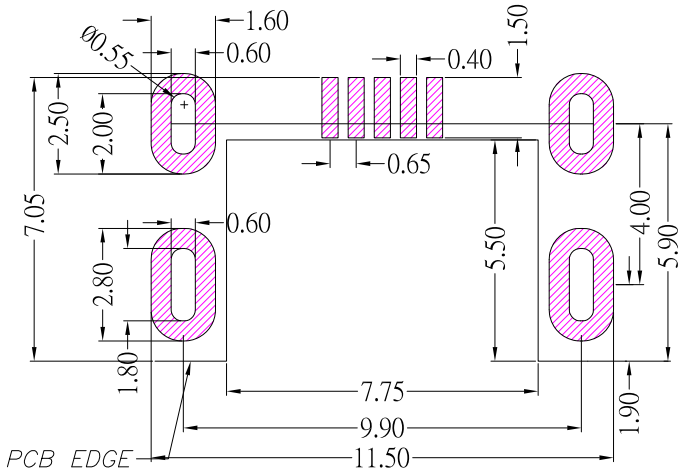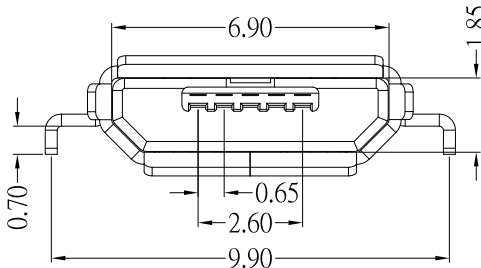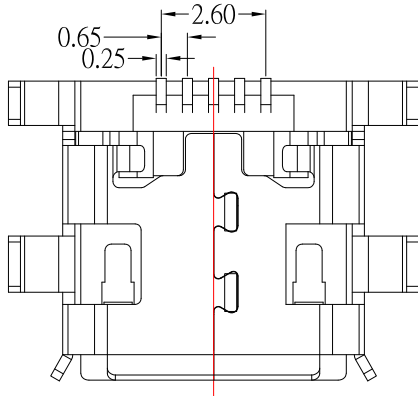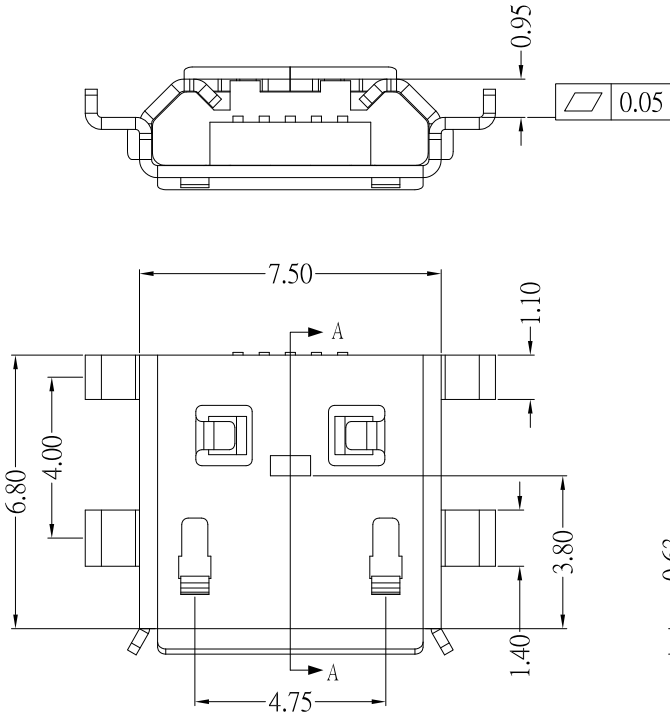

P.C.B LAYOUT MOUNTING PATTERN

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- FINISH:
- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
 - 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR
TIN UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
- 3.1 RATING: 1-5 PIN:1.8A , 2,3,4 PIN:1.0A
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1 MIN
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
 - 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
 - 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
 - 3.7 TEMPERATURE RANGE: -30℃ ~ +80℃



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5	±0.2
		Above 5 ~ 15	±0.3
		Above 15 ~ 30	±0.4
		Above 30 ~ 50	±0.5
		Angle	±0.3°
		3RD. ANGEL'S	
		UNITS	MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	11/06/18				
CHECKED BY:	DATE	FINISH		MODLE	MICRO USB 5B/F 沉板 板上H:1.5mm 四脚插
Jacky Chen	11/06/18				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-M15Ax-S347
Tony Kao	11/06/18	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-M15Ax-S347
				SIZE	A4
				VER	R2