
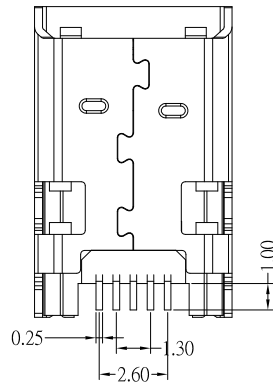

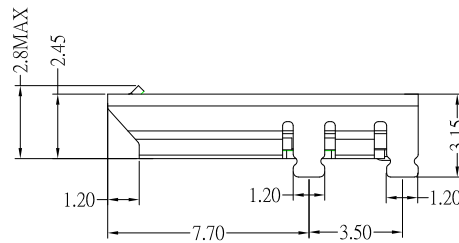


P.C.B LAYOUT MOUNTING PATTERN

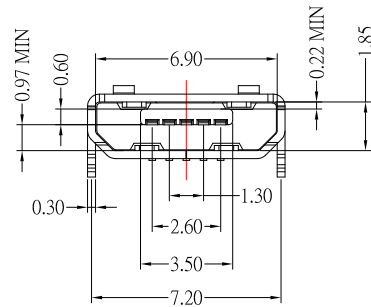

NOTES:

1.MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: SUS

2.FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: 1~5 PIN:1.8A , 2,3,4 PIN:1.0A

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1 MIN

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 TEMPERATURE RANGE: -30°C ~ +80°C



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 06/25/19

CHECKED BY: Jacky Chen
DATE: 06/25/19

APPROVED BY: Tony Kao
DATE: 06/25/19

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO 5P母四脚DIP斜口L=11.8
SCALE	1 : 1	DWG NO.	MRUSB-5B-D19NI-S235
SHEET NO.	1 of 1	PART NO.	MRUSB-5B-D19NI-S235

SIZE
A4
VER
R1