






MRUSB-5B-D2Ax-S235

SHELL鍍層:

TN
NI

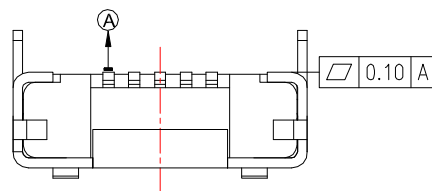

SECTION A-A

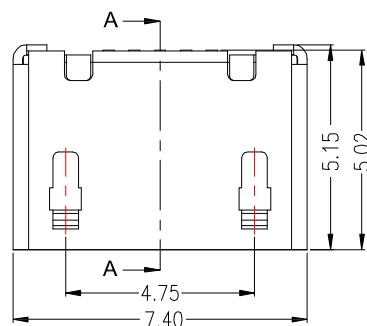

NOTES:

MATERIAL:



- 1.1 HOUSING: LCP, UL94V-0 ,Black
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: BRASS

FINISH:

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR
TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

- 3.1 RATING: 30V,1.5A
- 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
- 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
0.81~2.05 Kgf MIN.
- 3.7 TEMPERATURE RANGE: -25°C ~ +85°C

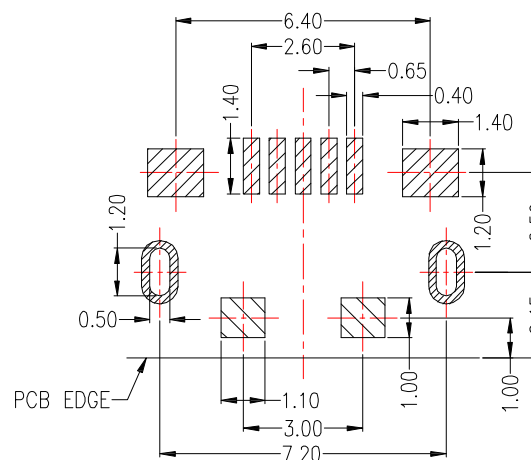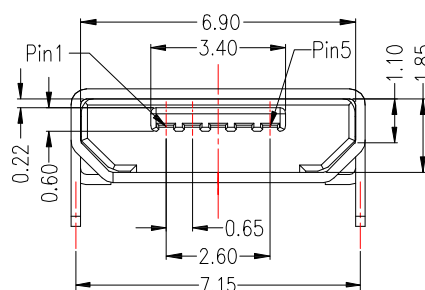

P.C.B LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	12/18/14
CHECKED BY:	DATE
Jacky Chen	12/18/14
APPROVED BY:	DATE
Tony Kao	12/18/14

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	MICRO USB 5P/F 贴片 无捲边 无柱 前插(7.15)后贴
SCALE	DWG NO.	MRUSB-5B-D2Ax-S235
SHEET NO.	PART NO.	MRUSB-5B-D2Ax-S235
		SIZE A4
		VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE
A			
B			
C			
D			
E			
F			
G			
H			
I			
J			