
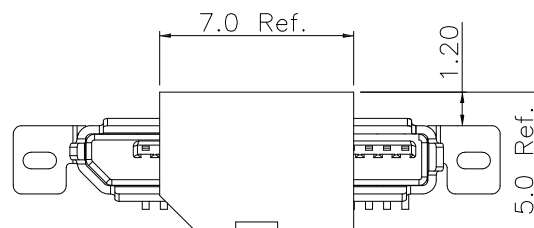
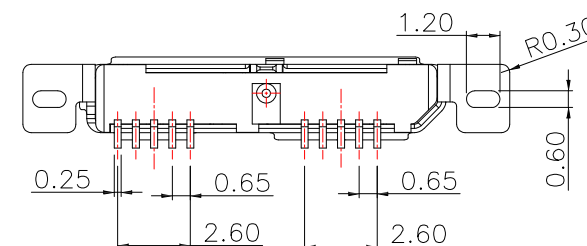

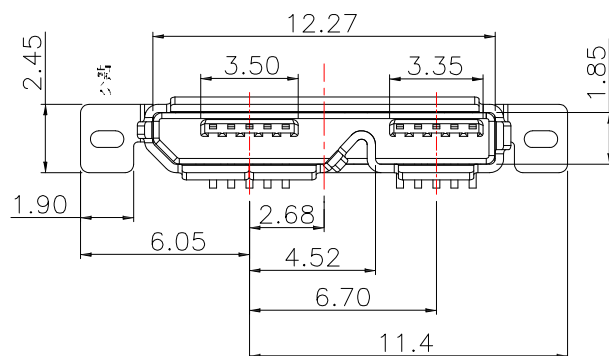
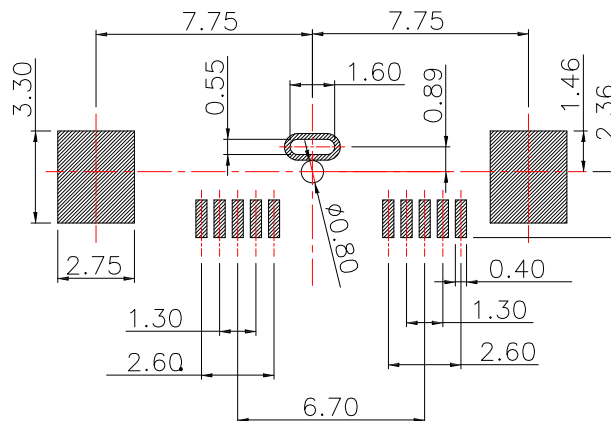


MRUSB-10B30xVSE-S242

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

P.C.B LAYOUT MOUNTING PATTERN

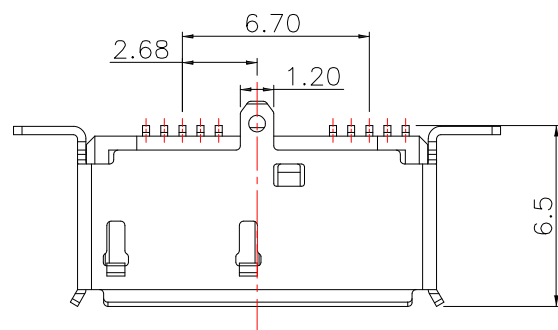

4	CAP	1	LCP	UL94V-0; COLOR:BLACK
3	SHELL	1	SUS304	Nickel under Plated surface layer
2	CONTACT	10	BRASS	Plated Gold in Mating Area ; Tin Plated on Solder Balls ; Nickel under plated overall
1	HOUSING	1	LCP	UL94V-0; COLOR:BLACK
NO	TITLF	O'TY	MATFRIAL	RFMARK



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	03/03/14	FINISH	MODLE	MICRO 3.0 B TYPE 直立式 有柱
CHECKED BY:	DATE	SCALE	DWG NO.	MRUSB-10B30xVSE-S242
Jacky Chen	03/03/14	1 : 1	PART NO.	MRUSB-10B30xVSE-S242
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	03/03/14			