
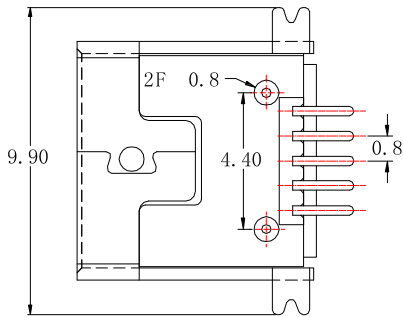
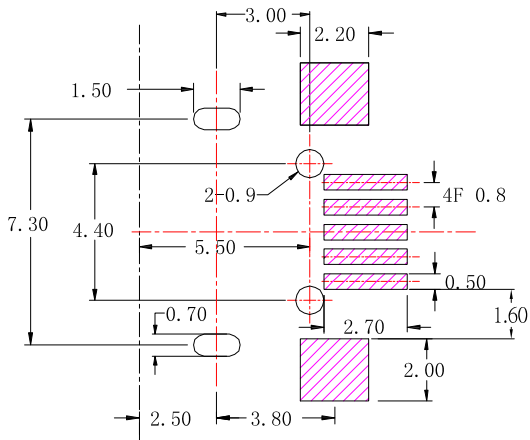



MUSB-5B-SD3-x-S175

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

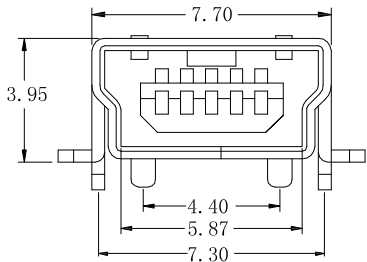

SPECIFICATIONS

Electrical :

- 1.Current Rating : 1.0A / contact terminal
- 2.Voltage Rating : 30V DC
- 3.Contact Resistance : 50 mΩ Max
- 4.Dielectric Withstanding Voltage : 300V AC
- 5.Insulation Resistance : 100 MΩ Min

Material :

- 1.Housing : LCP,UL 94V-0, Black
- 2.Contact : PHOSPHOR BRONZE
- 3.Shell : BRASS

Finish :

- 1.Contact : Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell : Nickel under Plated surface layer

P.C.B LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
03/12/18
DATE
03/12/18
DATE
03/12/18

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MINI USB B TYPE SMT (SHELL : 前DIP後SMT)
MUSB-5B-SD3-x-S175
MUSB-5B-SD3-x-S175

SIZE
A4
VER
R1