


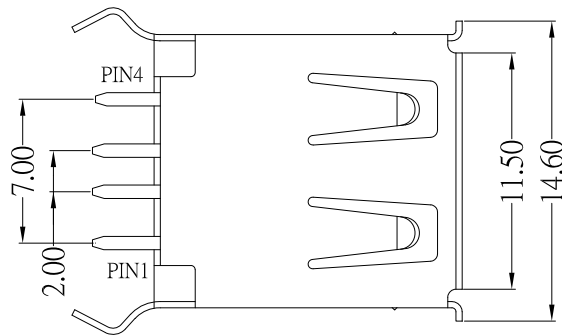





SUA-110V-x-x-S129

鍍層厚度 :

Blank : 1u"
2 : 15u"
3 : 30u"

COLOR :

Black: B
White : W

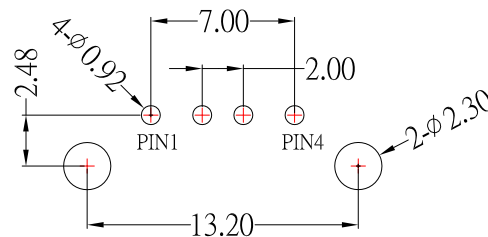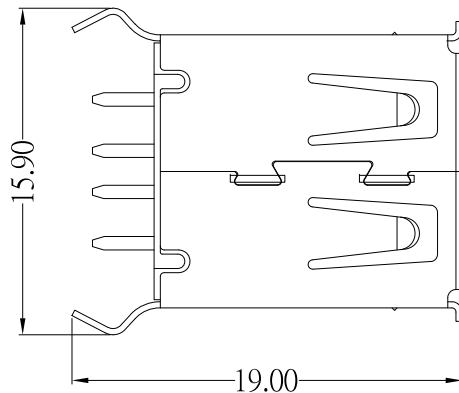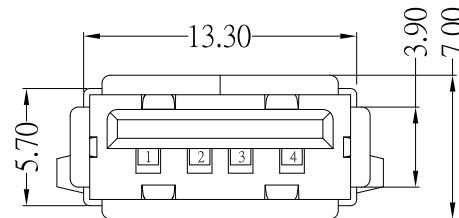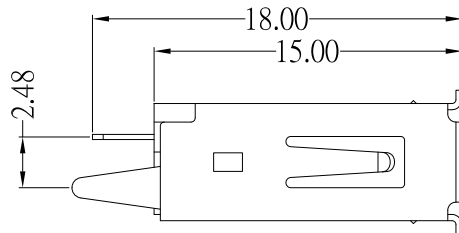

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

1.MATERIAL:

- a.HOUSING:PBT
- b.CONTACT:BRASS
- c.SHEEL: BRASS

2.PLATING :

- a.CONTACT: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- b.PLATING: Nickel under Plated surface layer

3.ELECTRICAL:

- a.DIELECTRIC WITHSTANDING VOLTAGE: AC 500V
- b.INSULATION RESISTANCE: 1,000MΩ MIN
- c.CONTACT RESISTANCE: 30 mΩ MAX;

3.MECHANICAL:

- a.INSERTION FORCE: 3.57kg MAX
- b.WITHDRAWAL FORCE: 1.02kg MIN



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/19/19
DATE: 06/19/19
DATE: 06/19/19

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.

CONNECTOR
USB AF VERTICAL TYPE DIP
SUA-110V-x-x-S129

SIZE
A4
VER
R4