



SUA-110P13x-x-S235

SHELL : _____

鍍層厚度 :






Blank : BRASS

Blank : 1u"

I : SPCC

2 : 15u"

3 : 30u"

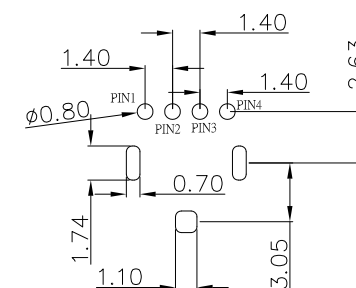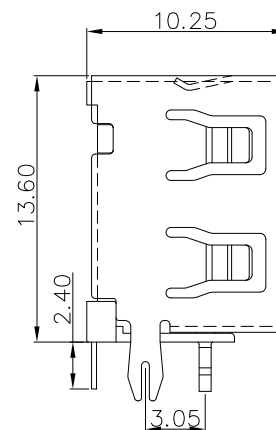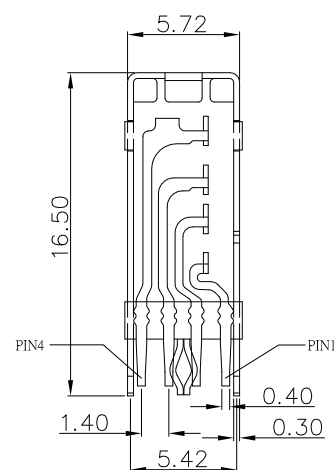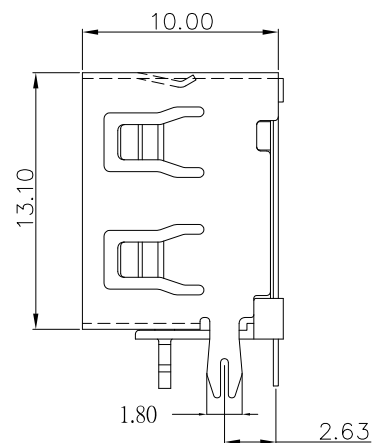

PCB LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Rated Voltage: 30V DC
- 2.Rated Current: 1.5 A Max
- 3.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 4.Insulation Resistance: 1,000 M Ω Min
- 5.Contact Resistance: 30 m Ω Max

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass/Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 11/07/17

CHECKED BY: Jacky Chen
DATE: 11/07/17

APPROVED BY: Tony Kao
DATE: 11/07/17

MAT'L

FINISH

SCALE

TITLE

MODLE

DWG NO.

CONNECTOR

USB A/F 短體內直腳,無捲邊 ,L:10.25mm

SUA-110P13x-x-S235

SIZE

A4

VER

A1