



SUA-110P6x-x-S235

SHELL : _____

Blank : BRASS

I : SPCC

COLOR :

Black: B

White : W

SPECIFICATIONS

Electrical:





- 1.Dielectric Withstanding Voltage: AC 500 V
- 2.Insulation Resistance: 1,000 M Ω Min
- 3.Contact Resistance: 30 m Ω Max

Material:


- 1.Housing: PBT ,UL94V-0
- 2.Terminal: Phosphor Bronze
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

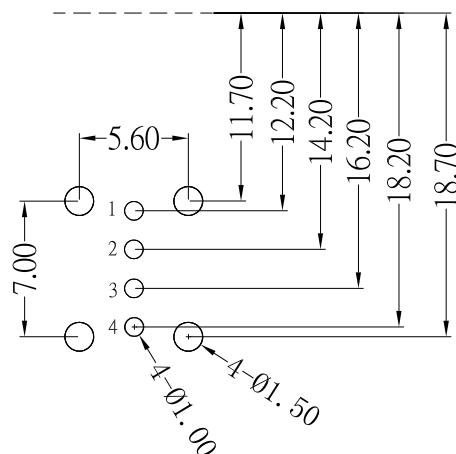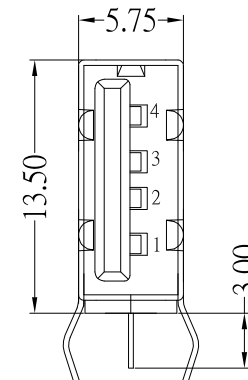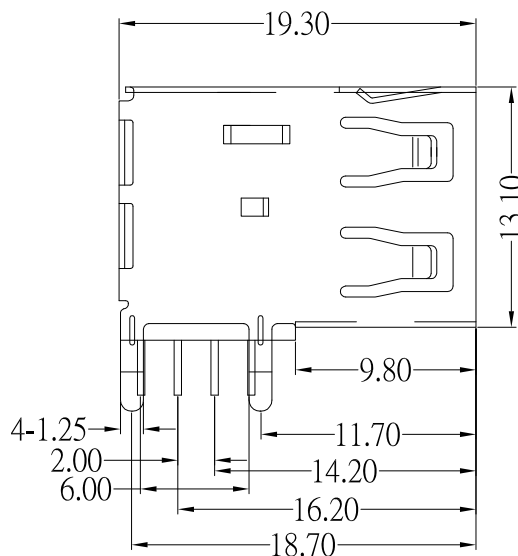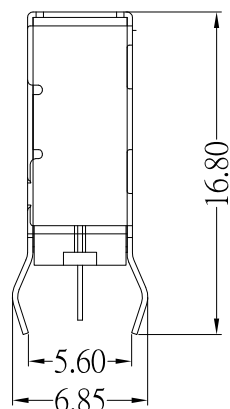

PCB LAYOUT MOUNTING PATTERN

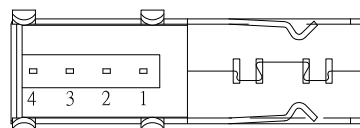

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 01/24/18

CHECKED BY: Jacky Chen
DATE: 01/24/18

APPROVED BY: Tony Kao
DATE: 01/24/18

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB A/F 側插無捲邊有後蓋

SUA-110P6x-x-S235

SUA-110P6x-x-S235

SIZE

A4

VER

R4