
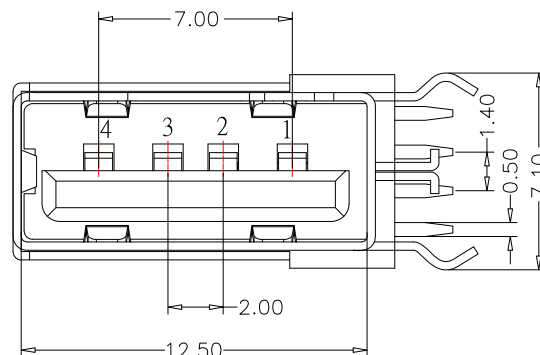
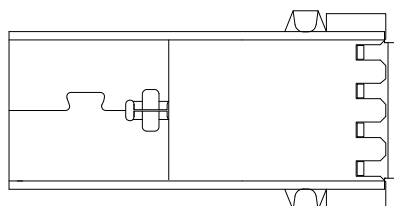
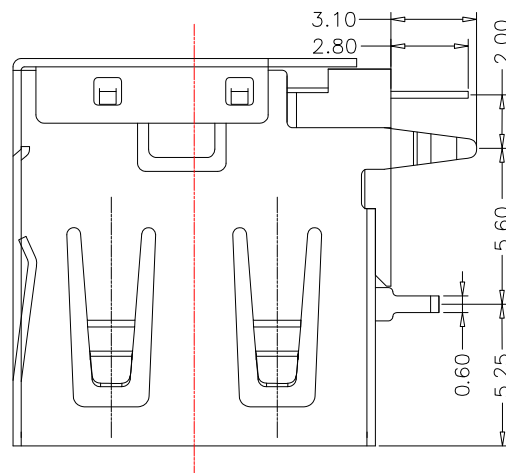


SUA-110P4x-x-S235

SHELL :	COLOR :
Blank : Phosphor Bronze	Black: B
I : SPCC	White : W

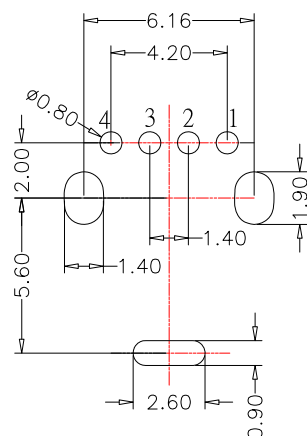

SPECIFICATIONS

Electrical:

- 1.Rated Voltage: 500V AC / DC
- 2.Rated Current: 2.0 A Max
- 3.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 4.Insulation Resistance: 1,000 M Ω Min
- 5.Contact Resistance: 30 m Ω Max

Material:

- 1.Housing: Thermo plastics ,UL94V-0
- 2.Terminal: Phosphor Bronze
- 3.Shell: Phosphor Bronze / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

PCB LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/27/14
DATE: 11/27/14
DATE: 11/27/14

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB AP侧插短体Y型脚无捲边 (L=14.0)
SCALE	1 : 1	DWG NO.	SUA-110P4x-x-S235
SHEET NO.	1 of 1	PART NO.	SUA-110P4x-x-S235

5	新增外殼材質選項	Jack	112714
4	更新尺寸14.00改14.20及新增尺寸和更新為A0版	Jack	091814
3	更新圖面膠芯樣式及尺寸	Jack	082514
2	新增尺寸	Jack	050613
1	新增PIN腳編號	Jack	050313
ITEM NO.	DESCRIPTION	DRAWN	DATE