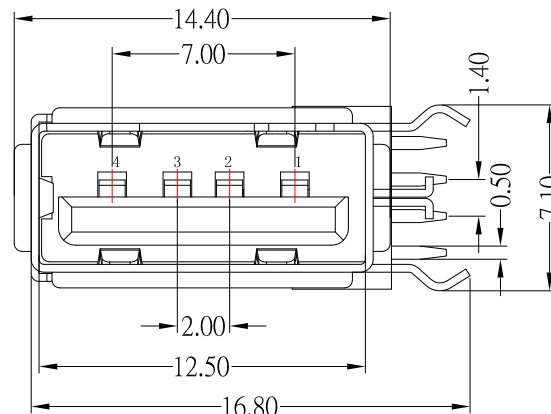
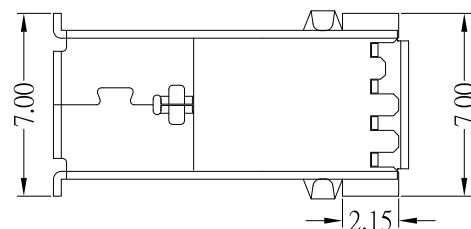


SUA-110P3x-x-S235

SHELL :


Blank : Phosphor Bronze

I : SPCC


COLOR :

Black: B

White : W

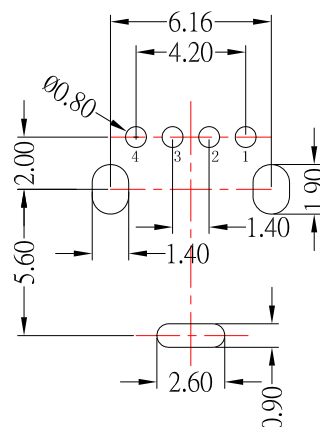

PCB LAYOUT MOUNTING PATTERN

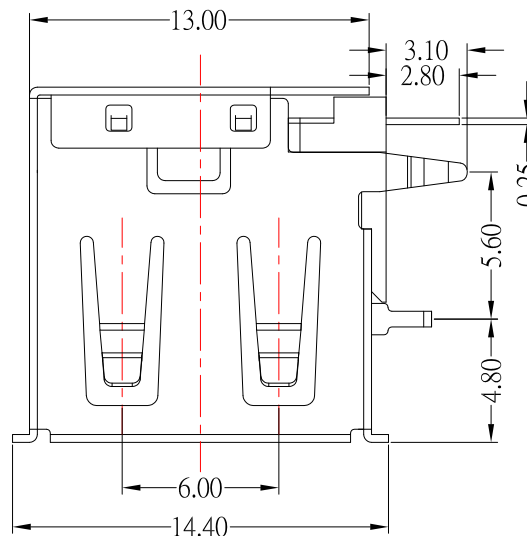

SPECIFICATIONS

Electrical:

- 1.Rated Voltage: 250V AC / DC
- 2.Rated Current: 1.5 A Max
- 3.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 4.Insulation Resistance: 1,000 M Ω Min
- 5.Contact Resistance: 30 m Ω Max

Material:

- 1.Housing: PBT
- 2.Contact: Phosphor Bronze
- 3.Shell: Phosphor Bronze / SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch JacK Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 05/15/15

CHECKED BY: Jacky Chen
DATE: 05/15/15

APPROVED BY: Tony Kao
DATE: 05/15/15

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB AP侧插短體Y型腳有卷邊 L=13.6
SCALE	DWG NO.	SUA-110P3x-x-S235
SHEET NO.	PART NO.	SUA-110P3x-x-S235

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新Rated Voltage和Rated Current	Jack	051515
4	更新圖面	Jack	072814
3	更新尺寸及變更為A0版	Jack	070814
2	更新Housing材質	Jack	102113
1	新增接觸編號及外觀選項	Jack	080213