



SUA-110M18x-x-S235

Shell Material :






Blank : BRASS

I : SPCC

COLOR :

Black: B

White : W

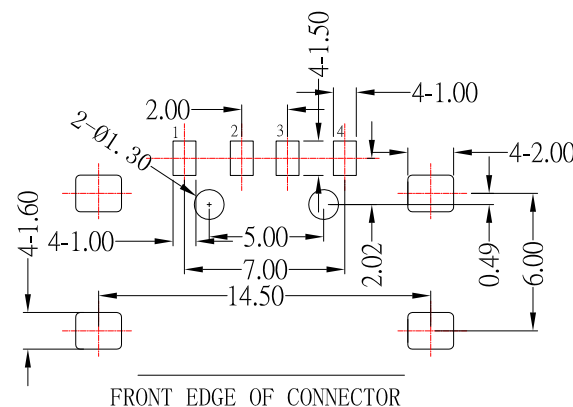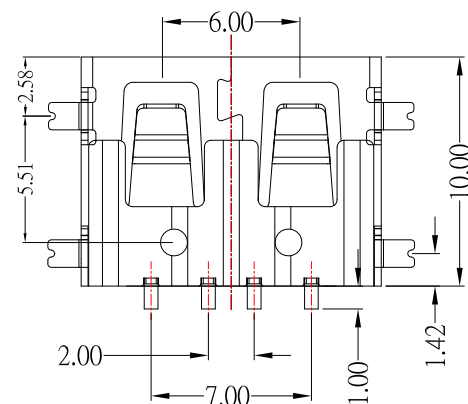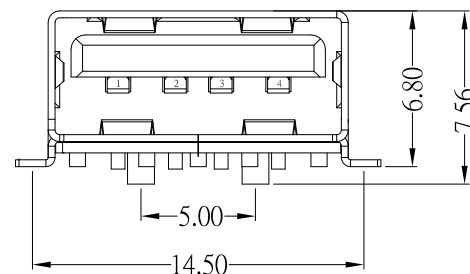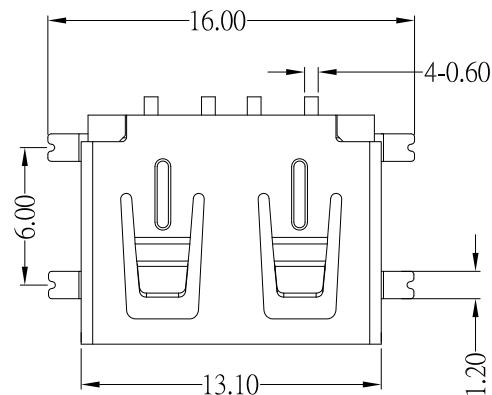

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC FOR 1 MIN
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Operating Temperature: -55°C ~ 85°C

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 35N(3.57 kgf) Max
Unmate force: 10~35N(1.02~3.57 kgf) Min



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/12/18
DATE: 10/12/18
DATE: 10/12/18

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
SIZE
A4
VER
A3

1 : 1
1 of 1

SUA-110M18x-x-S235
SUA-110M18x-x-S235

USB A/F 短體10.0 4腳魚叉SMT 無捲邊

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	更新樣式	Jack	101218
4	新增PIN編號	Jack	110717
3	新增外殼材質選項	Jack	032317
2	新增尺寸及更新為A0版	Jack	072814
1	更新圖面及新增尺寸	Jack	071614