

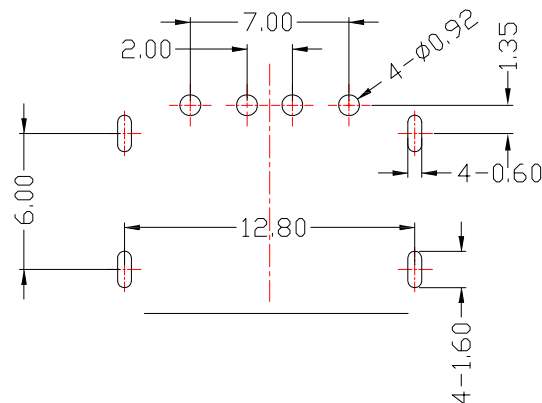

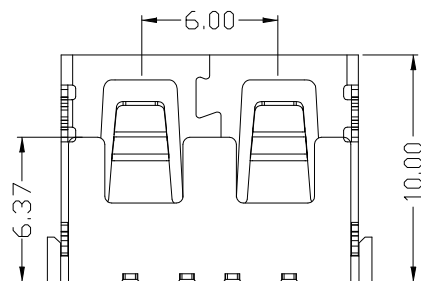


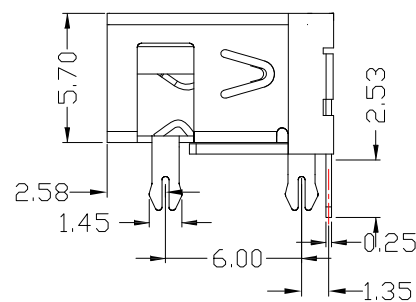

Recommended PCB Layout

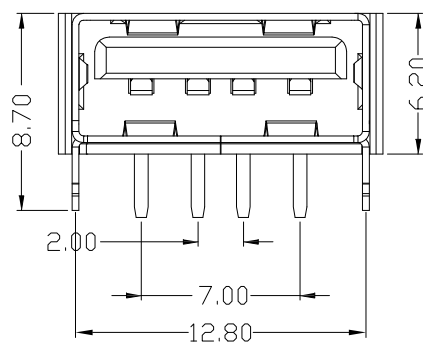

SUA-110H20-x-S235

Color :

W:White

B:Black

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Insulation Resistance: 1,000 MΩ Min
- 3.Dielectric Withstanding Voltage:
Unmated Contavt 500 V AC FOR 1 min

Mechanical:

- 1.Insertion force: 35N(3.57 Kgf) Max
- 2.Extraction force: 10~30N(1.02~3.57Kgf)
- 2.Operating Temperature: -55°C ~ 85°C



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 09/10/13
DATE: 09/10/13
DATE: 09/10/13

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB A/F 短體 10.0 無捲邊 4腳
SCALE	DWG NO.	SUA-110H20-x-S235
SHEET NO.	PART NO.	SUA-110H20-x-S235

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增尺寸	Jack	091013