
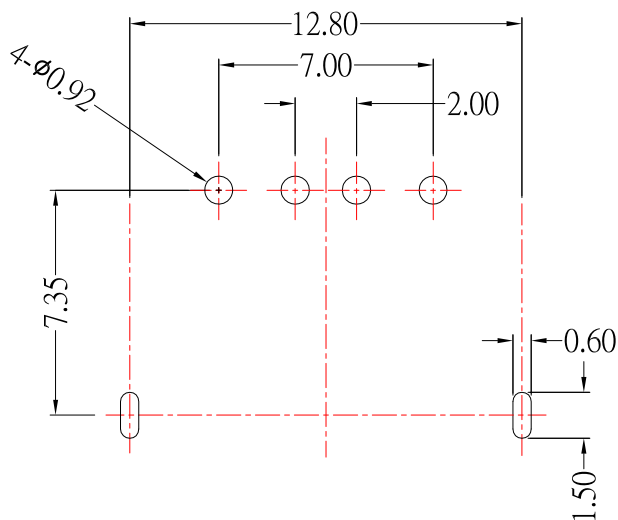
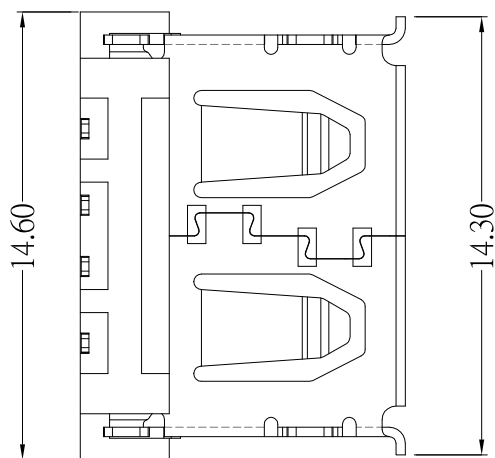
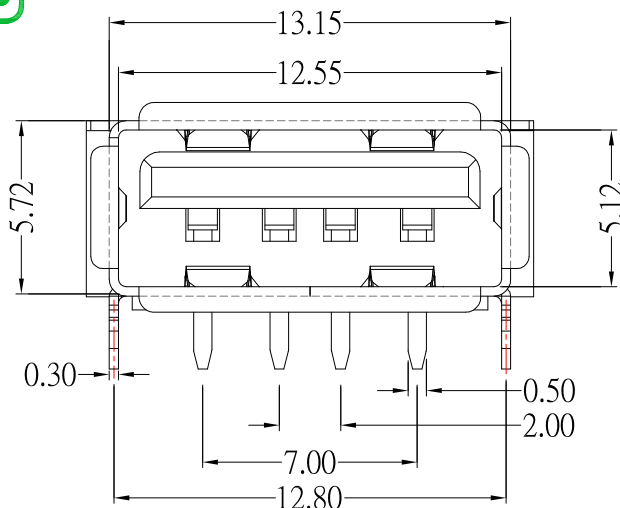


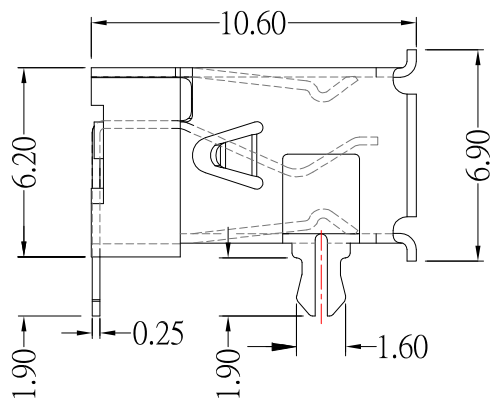

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 milliohms Max
- 4.Dielectric Withstanding Voltage:
500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MEGA ohms Min

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.57 kgf (Max)
Unmate force: 1.02 kgf (Min)
- 2.Terminal Retention: 1.2 kgf (Min)

Material:

- 1.Housing:
High Temperature Thermal Plastics,
UL 94V-0 , PBT , White/Black
- 2.Contact: BRASS
- 3.Shell: BRASS/SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area;
Tin on Solder Balls
- 2.Shell: Nickel Plating

SUA-110H9-x-S175

Color :

W:White

B:Black



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Frank Wu

DATE

03/22/12

CHECKED BY:

Jacky Chen

DATE

03/22/12

APPROVED BY:

Tony Kao

DATE

03/22/12

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB AF 短體90度 魚叉腳

SUA-110H9-x-S175

SUA-110H9-x-S175

SIZE

A4

VER

A

ITEM NO. DESCRIPTION DRAWN DATE