

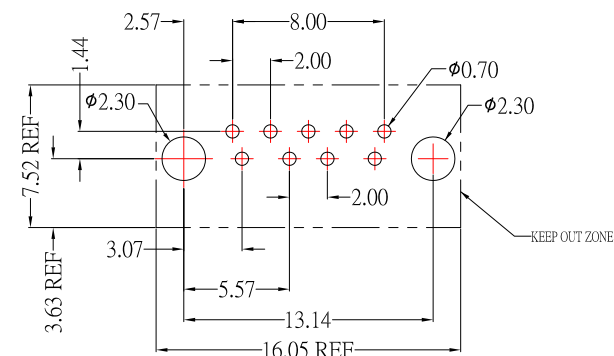


Blank : 1u"
2 : 15u"
3 : 30u"



3.4 Contact Resistance: 30mΩ Max

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

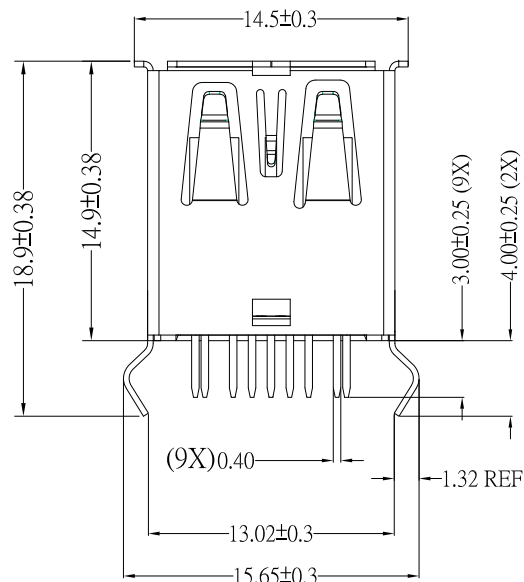

7			
2	更新圖面	Jack	051420
1	新增顏色標示	Jack	112018
ITEM NO.	DESCRIPTION	DRAWN	DATE



Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	05/14/2012
CHECKED BY:	DATE
Jacky Chen	05/14/2012
APPROVED BY:	DATE
Tony Kao	05/14/2012

MAT'L
FINISH
SCALE
SHEET NO

TITLE	CONNECTOR
MODLE	USB 3.0 A/F 180 度 直插
DWG NO.	SUA-110V-30x-S242
PART NO.	SUA-110V-30x-S242

	SIZE
	A4
	VER
	B2