

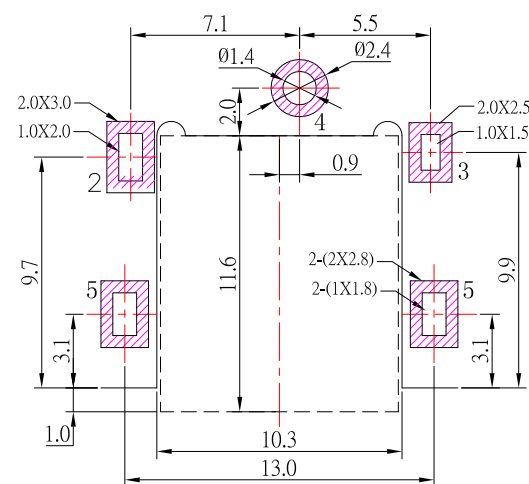
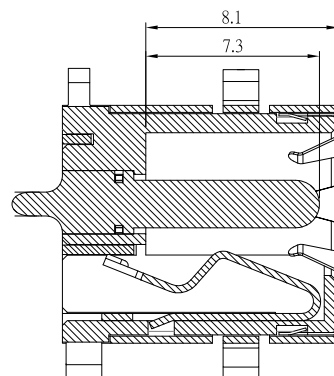
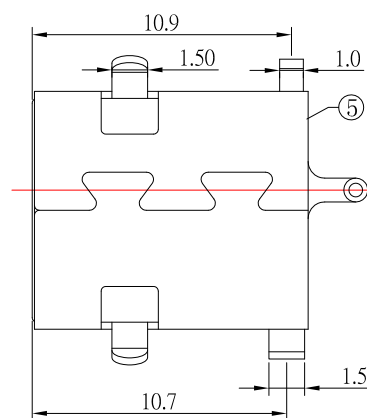


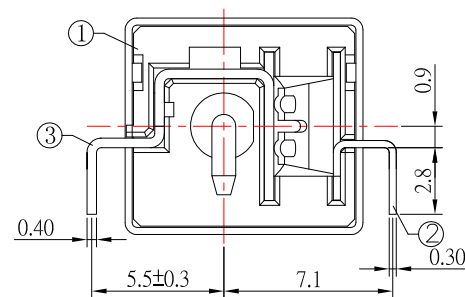
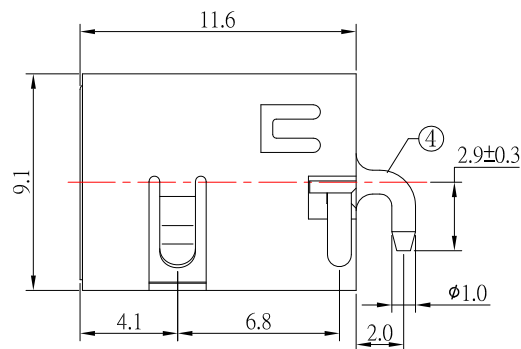


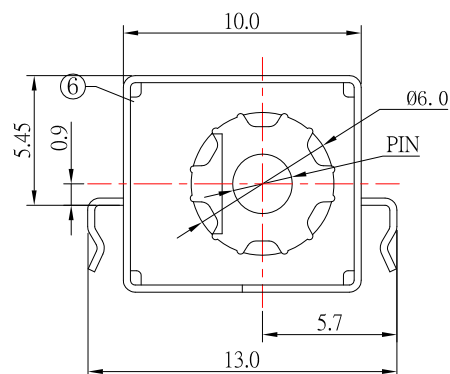

SPECIFICATION

1. Rating : DC 20V, 5.5A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

MODEL NO.	DC-D3200-X
SCHEMATIC	
CENTER PIN	$\varnothing 2.00\text{mm}$ $\varnothing 2.50\text{mm}$

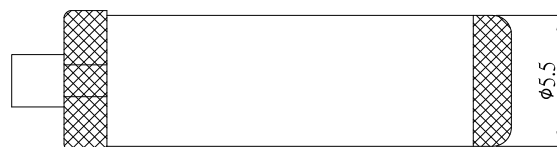

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
6	SPRING PIECE	1	SUS301	———	———
5	COAT	1	IRON	———	Ni-Plating
4	PIN	1	ZINC ALLOY	———	Ni-Plating
3	CONTACT FOOT	1	BRASS	———	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	———	Ag-Plating
1	HOUSING	1	PA9T	———	———



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu

DATE: 04/24/18

CHECKED BY: Jacky Chen

DATE: 04/24/18

APPROVED BY: Tony Kao

DATE: 04/24/18

MAT'L

TITLE

JACK

FINISH

MODLE

DC JCAK

SCALE

1 : 1

DWG NO.

DC-D3200-x-S124

SHEET NO.

1 of 1

PART NO.

DC-D3200-x-S124

SIZE

A4

VER

A2

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新CENTER PIN选项	Jack	042418
3	新增尺寸	Jack	070717
2	更新为A0版	Jack	112416
1	新增尺寸	Jack	111716