

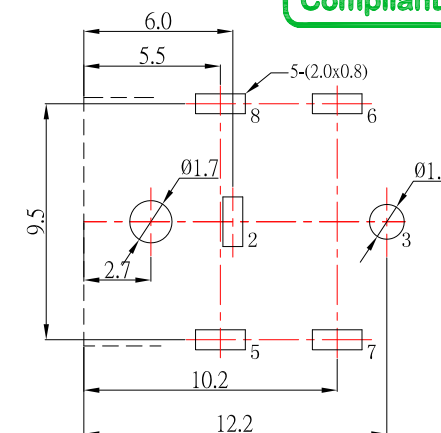
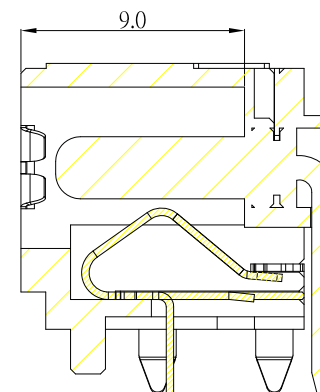
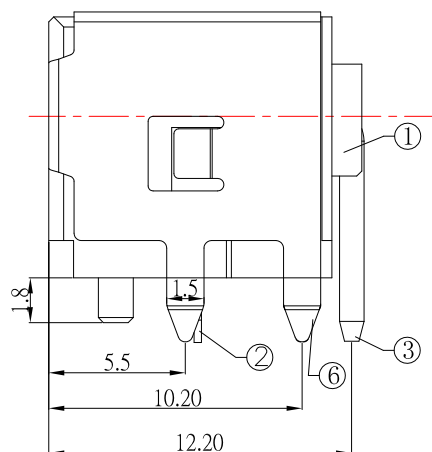
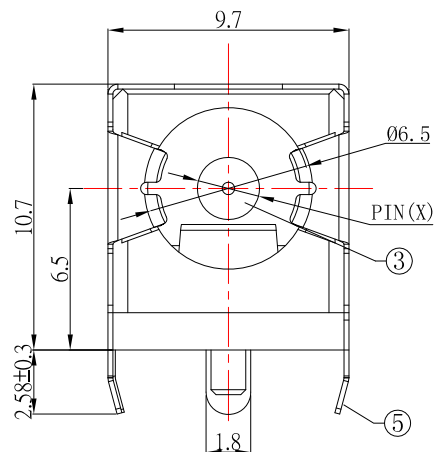
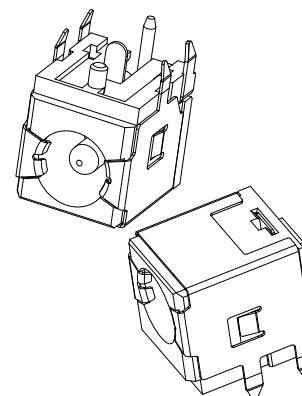


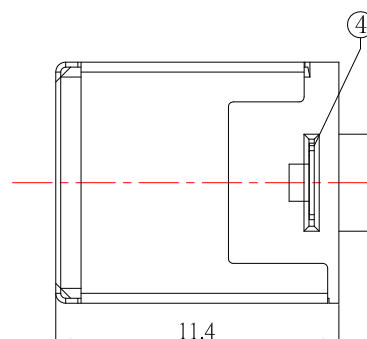

P.C.B LAYOUT
TOP VIEW

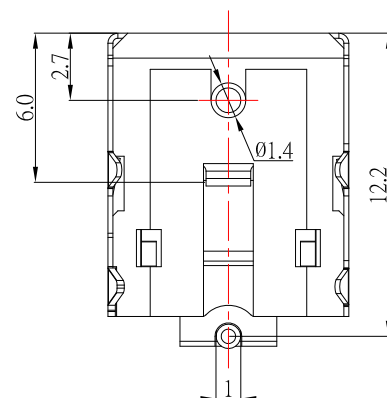

SPECIFICATION

- 1.Rating : DC 48V,5.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-40N
- 6.life test : 5,000 cycles

Model NO.	DC-D3035H-2.0	DC-D3035H-2.5
PIN(X)	$\phi 2.0$	$\phi 2.5$

MODEL NO.	DC-D3035H-x
SCHEMATIC	

6	CONTACT FOOT	1	BRASS	Ni/Sn-Plating
5	CONTACT FOOT	1	SUS	Ni-Plating
4	STOPPER	1	SUS	
3	PIN	1	BRASS	Ni-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ni/Sn-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	新增剖面圖	Jack	032118
3	新增尺寸	Jack	052517
2	更新為AO版	Jack	060816
1	更新外觀腳位編號	Jack	032516
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	03/21/18			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	03/21/18			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-D3035H-x-S214
Tony Kao	03/21/18	1 : 1		
		SHEET NO.	PART NO.	DC-D3035H-x-S214
		1 of 1		
				SIZE A4
				VER A3