


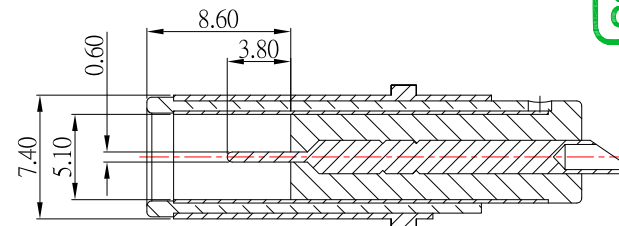






DATE CODE

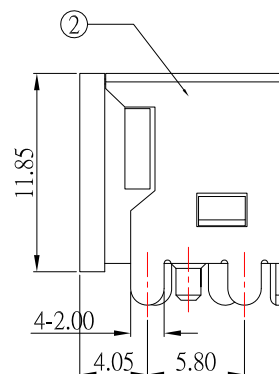



MATE PLUG $\phi 7.40$

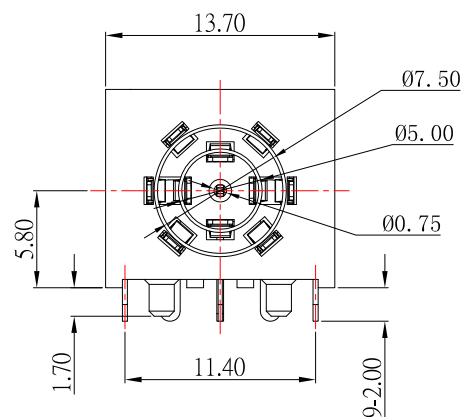

MODEL NO.	DC-D286CH-0.6-S214
SCHEMATIC	 2 (POWER PIN)  4 (CENTER PIN)  1 (GROUND PIN)

SPECIFICATION

- Rating : DC 20V 5.0A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles

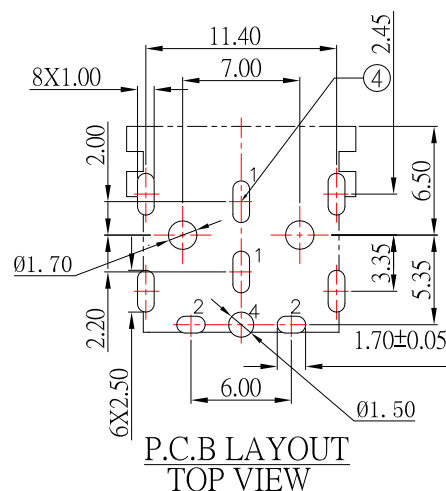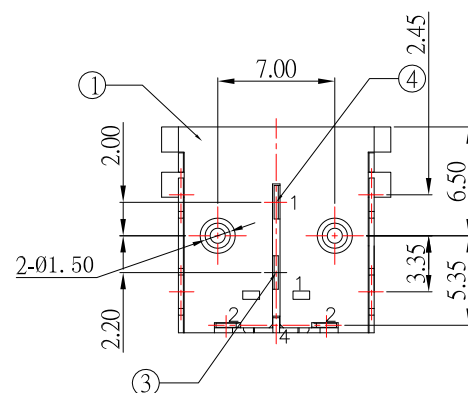

P.C.B LAYOUT
TOP VIEW

6	POWER	1	COPPER ALLOY	Au-Plating
5	POWER PIN	1	COPPER ALLOY	Au-Plating
4	GROUND PIN2	1	COPPER ALLOY	Au-Plating
3	GROUND PIN1	1	COPPER ALLOY	Au-Plating
2	SHIED	1	COPPER ALLOY	Ni-Plating
1	HOUSING	1	HIGH TEMP PLASTIC	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	12/09/16			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	12/09/16			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-D286CH-0.6-S214
Tony Kao	12/09/16	1 : 1		
		SHEET NO.	PART NO.	DC-D286CH-0.6-S214

1	更新life test	Jack	120916
ITEM NO.	DESCRIPTION	DRAWN	DATE