

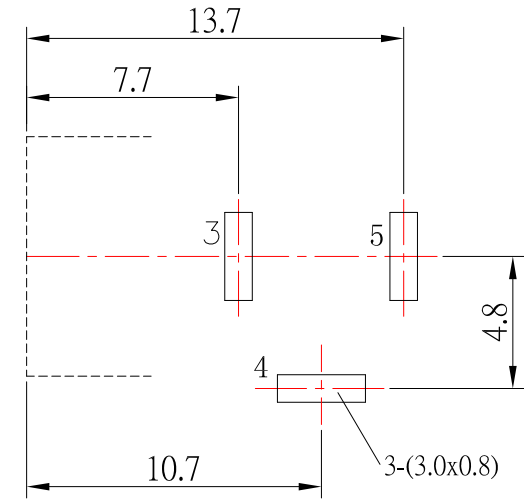


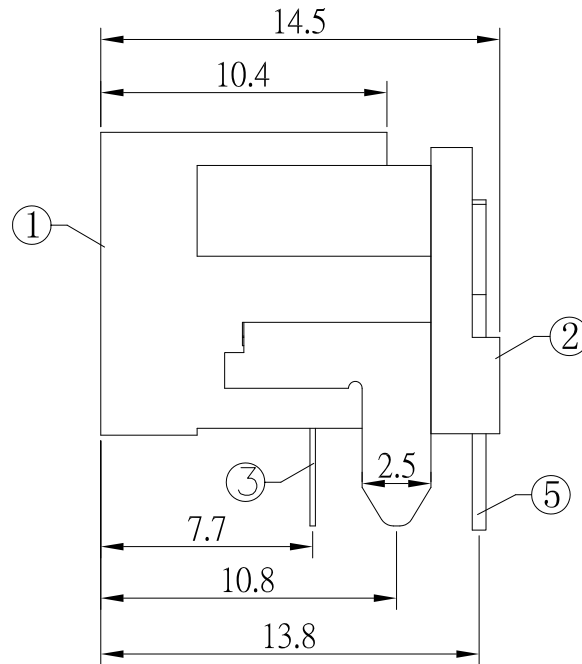

SPECIFICATIONS

- 1.Rating : DC 30V 1.0A
- 2.Contact resistance : $\leq 0.03 \Omega$
- 3.Insulation resistance : $\geq 100M \Omega$ (DC250V)
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

6	PIN	1	BRASS	Ni-Plating
5	FLAT FOOT	1	BRASS	Ag-Plating
4	CURVE PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	SUS301	Ag-Plating
2	COVER	1	PA9T	
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

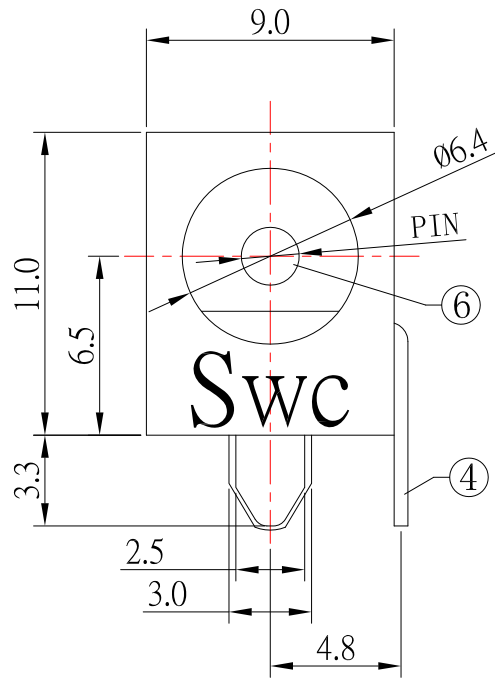

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
04/10/14
DATE
04/10/14
DATE
04/10/14

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.

JACK
DC JACK
DC-D096-x-S125

PART NO.
DC-D096-x-S125

SIZE
A4
VER
R1