

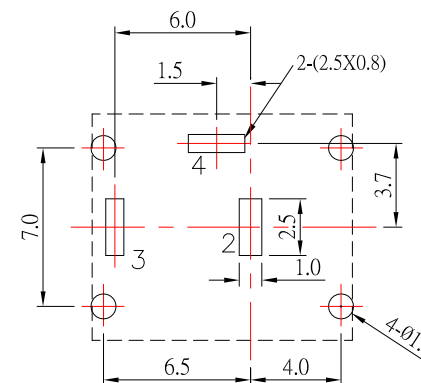
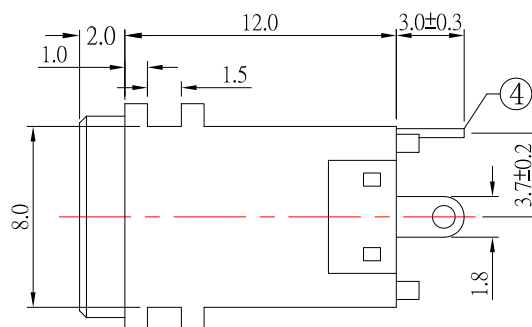
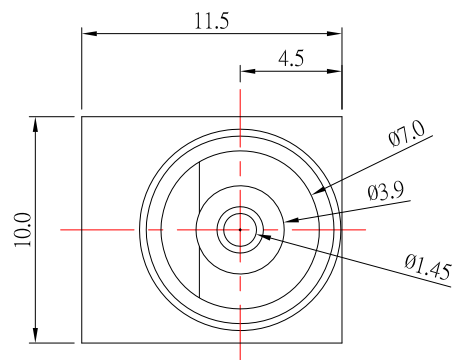


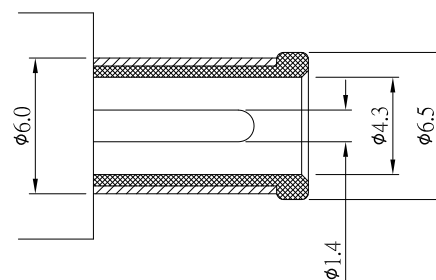

P.C.B LAYOUT
TOP VIEW

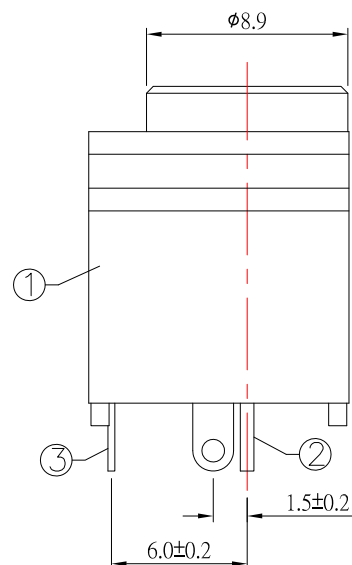

DC MATE PLUG

MODEL NO.	DC-D037-1.4
SCHEMATIC	

SPECIFICATION

- 1.Rating : DC 30V, 2.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
④	CONTACT FOOT	1	BRASS	Ag-Plating
③	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
②	CURVE PIECE	1	PHOSPHOR BRONZE	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/22/18			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	01/22/18			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	01/22/18	1 : 1	DC-D037-1.4-S124	A4
		SHEET NO.	PART NO.	VER
		1 of 1	DC-D037-1.4-S124	R1



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新PCB LAYOUT	Jack	012218